

Better home better life

TUTTI

DOUBLE WALL DRAWER / SLIDE SERIES

2026

GUANGDONG
TUTTI HARDWARE CO.,LTD.

TEL: 0086-757-29201220
EMAIL: export2@tuttihardware.com

MOBILE: 0086-137 03015997
WEBSITE: www.tuttihardware.com


No.1, Chonggu Road, No.2-1-1, Zhongchong Industrial Zone, Zhongchong Village, Leliu Town, Shunde, Foshan City, Guangdong, China.



TUTTI



DOUBLE WALL DRAWER / SLIDE SERIES

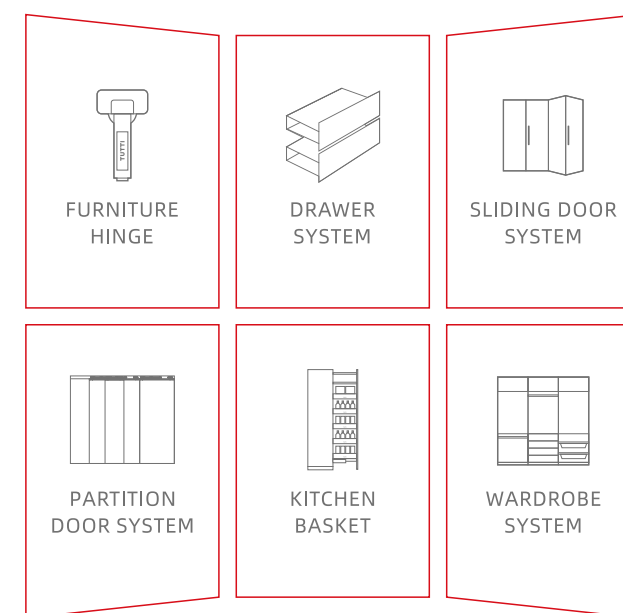

TUTTI

INTRODUCTION

TUTTI, Founded in 2009, is a global leader in furniture hardware solutions, specializing in R&D, manufacturing, marketing, and after-sales service. Our product range includes hinges, slides, wardrobe sliding door systems, partition door systems, wardrobe fittings, and kitchen baskets.

With a 250,000-square-meter manufacturing facility, cutting-edge digital systems, and a team of over 2,500 professionals, TUTTI is committed to delivering high-quality, innovative solutions. Backed by nearly 100 engineers and significant annual R&D investments, we have developed a diverse product portfolio of 300+ categories, 1,000+ models, and secured nearly 100 national patents.

Recognized as a National High-Tech Enterprise and a Guangdong Famous Brand, our products meet international standards, including SGS and TUV certifications. Partnering with leading real estate developers and home furnishing brands, TUTTI serves customers in nearly 100 countries, earning global trust and recognition.

Driven by innovation, precision, and customer focus, TUTTI is dedicated to enhancing living environments through advanced furniture hardware solutions.

→ COMPANY CULTURE

VISION

Create a world-class brand of home hardware

MISSION

Focus on technology, innovation and service for creating a better living environment.

→ COMPANY VALUE

- Customer first
- Respect
- Responsibility
- Fairness and Justice
- Win-win
- Gratitude and Dedication

6


6 product series

300⁺

300+categories

1000

1000+models

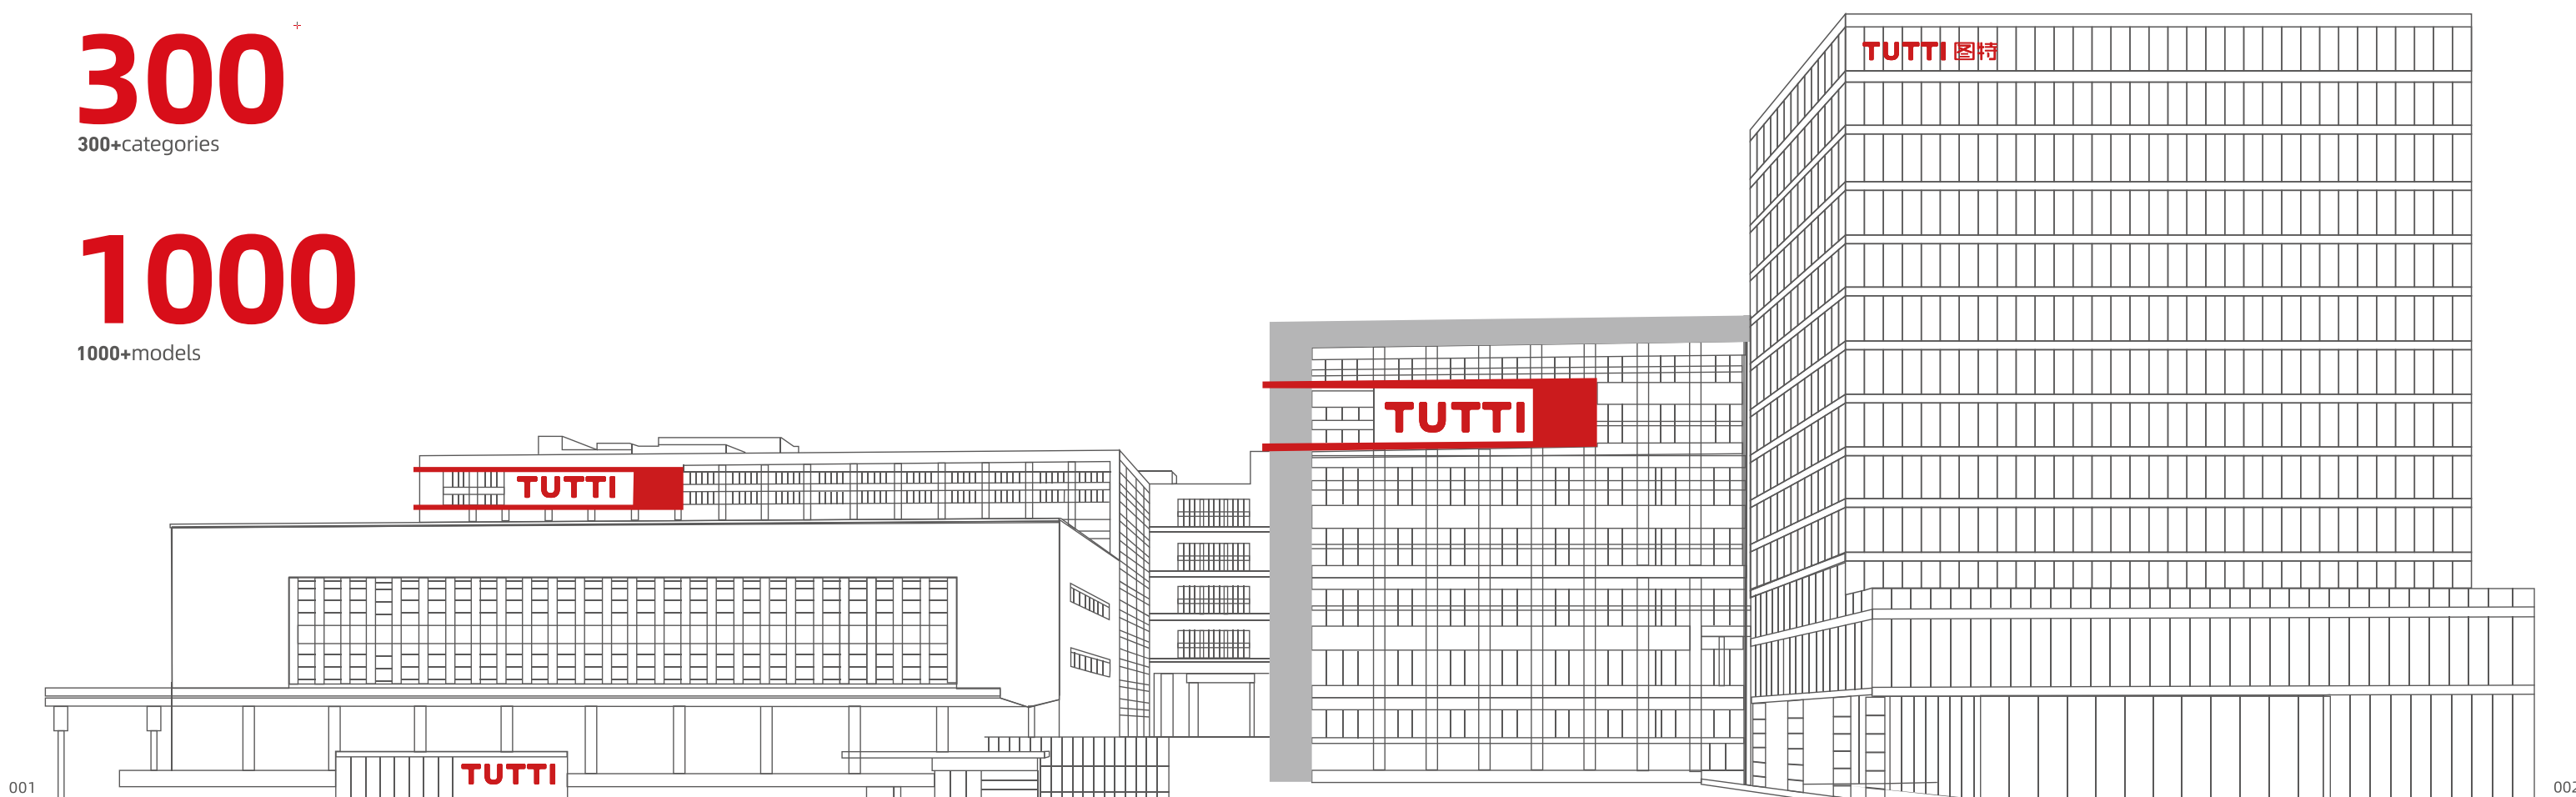

T

COMPANY HONOR

As one of the top brands in the hardware industry, TUTTI has obtained many honors, such as National High-tech Enterprise, Top 10 of Chinese Home Furnishing Manufacturing (Hardware Industry), Guangdong Famous Brand, Foshan Leading Enterprises in Subdivided Industries, and Most Popular Brand in the Home Hardware Industry, etc. , and serve as the hardware industry's "dual president" unit, assuming more social responsibilities. Relying on continuous product innovation and researching, TUTTI has obtained nearly 100 national patents.



National High-tech Enterprise



ISO9001 Quality Management System Certification



Guangdong Provincial Engineering Technology Research Center



Guangdong Professionally Innovative Enterprise



Foshan Standard



Foshan Technology Innovation top 100 Enterprise



Guangdong Famous Brand



100+ Patents



Foshan Leading Enterprises In Subdivided Industries



Patent



Shunde Home Hardware Association President unit



Guangdong Hunan Chamber of Commerce Furniture Association President Unit

CATALOGUE

Double Wall Drawer




S50A Metal dream box	009-012
S50B Glass dream box	013-016
S50 Inner dream box	021-022
S91 Metal slim double wall drawer	029-032
S90 Metal slim double wall inner drawer	035-036
S90B Glass slim double wall drawer	039-042
S90B Glass slim double wall inner drawer	045-046
S80 Double wall drawer	047-056
S80 Double wall inner drawer	059-060
S51E Ultra slim drawer	061-067

Undermounted Slide




S32 Full extension undermounted slide	073-077
S33 Full extension undermounted slide	078-079
S39 Full extension undermounted slide	081-082
S42 Full extension undermounted slide	083-084
S20 Partial extension undermounted slide	085-087
S21 Partial extension undermounted slide	088-090

Ball Bearing Slide



S4501 Full extension ball bearing slide	091-092
S4502 Full extension soft closing slide	093-094
S4503 Full extension push-open slide	095-096



**DOUBLE WALL
DRAWER SERIES**





S50

Dream Box - Illuminated Glass Sides

Glass side
panel



Clip-on
installation



35 kg
load capacity



3D
adjustment



Soft-closing






S50AL600
DREAM BOX (LOW DRAWER)

- Load capacity: 35kg
 - Length: 250-600mm
 - Height of drawer sides: 95.5mm
- Front panel width adjustment: ±1.2mm
 - Front panel height adjustment: ±2mm
 - Front panel tilt adjustment: -1.5,+4mm
 - Drawer depth adjustment: 0-5mm




INSTALLATION PARAMETERS


LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth

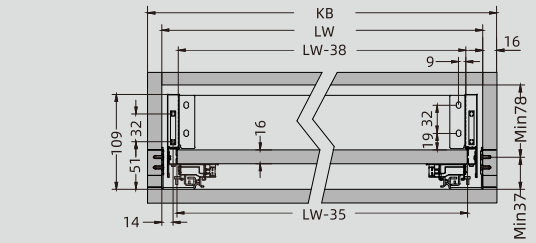

16mm panel

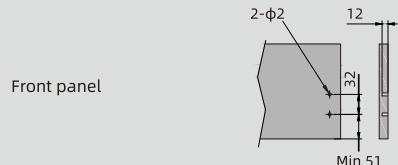


Front panel



Base panel




Back panel

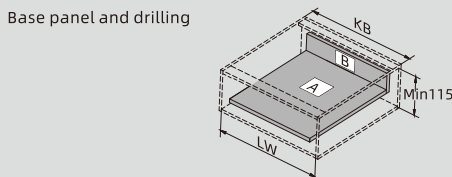


Base panel and drilling

Standard drawer

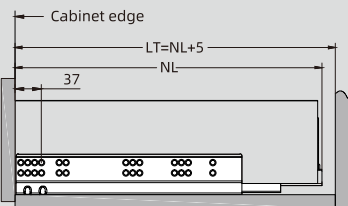

16mm panel


Hole position (mm)

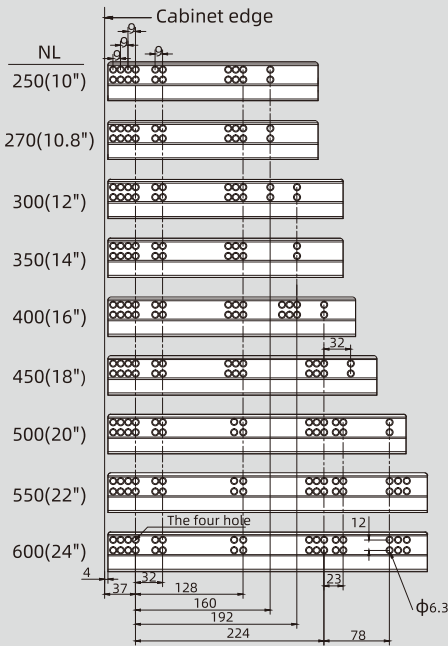

DRAWER SLIDES L/R	ITEM NO.	FUNCTION	SIDE PANELS L/R DECORATIVE COVERS L/R	ITEM NO.
	S32H650	Soft close		S50AL600D/M-250CB
	S32F651	Push open		S50AL600D/M-270CB
	S32F653	Push open with stabilizer bar		S50AL600D/M-300CB
	S39P650	Push open & soft close		S50AL600D/M-350CB
				S50AL600D/M-400CB
				S50AL600D/M-450CB
				S50AL600D/M-500CB
				S50AL600D/M-550CB
				S50AL600D/M-600CB

Side panel colors: D for grey, M for white

Accessories

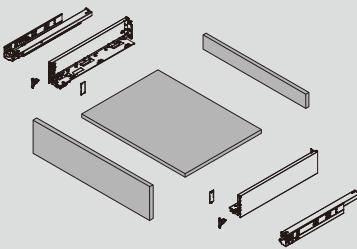

S50AM600
DREAM BOX (MEDIUM DRAWER)

- Load capacity: 35kg

• Length: 250-600mm

• Height of drawer sides: 133.5mm
- Front panel width adjustment: ±1.2mm

• Front panel height adjustment: ±2mm


• Front panel tilt adjustment: -1.5,+4mm

• Drawer depth adjustment: 0-5mm




INSTALLATION PARAMETERS

LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth

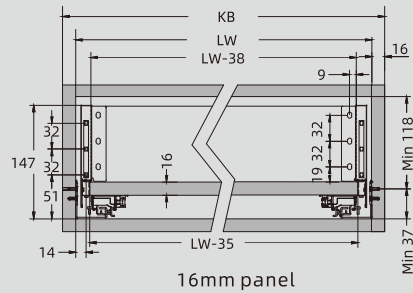


16mm panel

Standard drawer

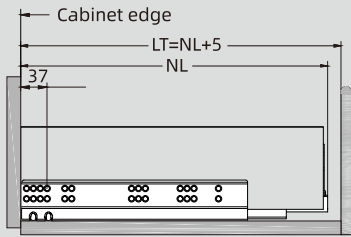


16mm panel


Hole position (mm)

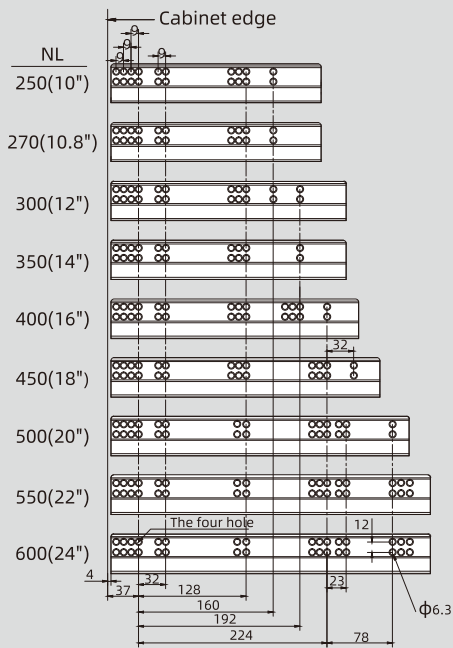


Front panel




Base panel



Back panel




Base panel and drilling



DRAWER SLIDES L/R	ITEM NO.	FUNCTION	SIDE PANELS L/R DECORATIVE COVERS L/R	ITEM NO.
	S32H650	Soft close		S50AM600D/M-250CB
	S32F651	Push open		S50AM600D/M-270CB
	S32F653	Push open with stabilizer bar		S50AM600D/M-300CB
	S32F653	Push open with stabilizer bar		S50AM600D/M-350CB
	S32F653	Push open with stabilizer bar		S50AM600D/M-400CB
	S39P650	Push open & soft close		S50AM600D/M-450CB
	S39P650	Push open & soft close		S50AM600D/M-500CB
	S39P650	Push open & soft close		S50AM600D/M-550CB

Side panel colors: D for grey, M for white

Accessories

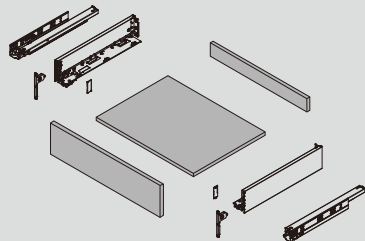

S50AH600
DREAM BOX (HIGH DRAWER)

- Load capacity: 35kg

• Length: 250-600mm

• Height of drawer sides: 180.5mm
- Front panel width adjustment: ±1.2mm

• Front panel height adjustment: ±2mm


• Front panel tilt adjustment: -1.5,+4mm

• Drawer depth adjustment: 0-5mm




INSTALLATION PARAMETERS

LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth

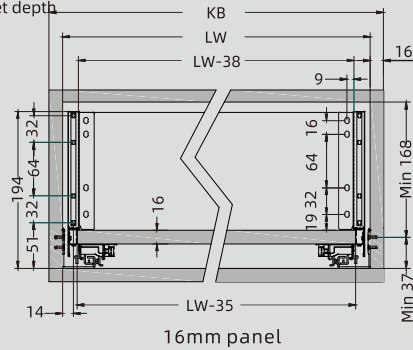


16mm panel

Standard drawer

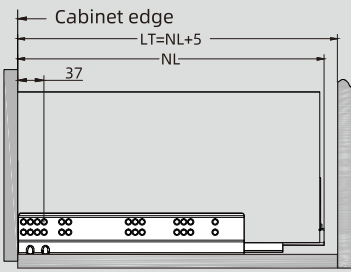


16mm panel


Hole position (mm)

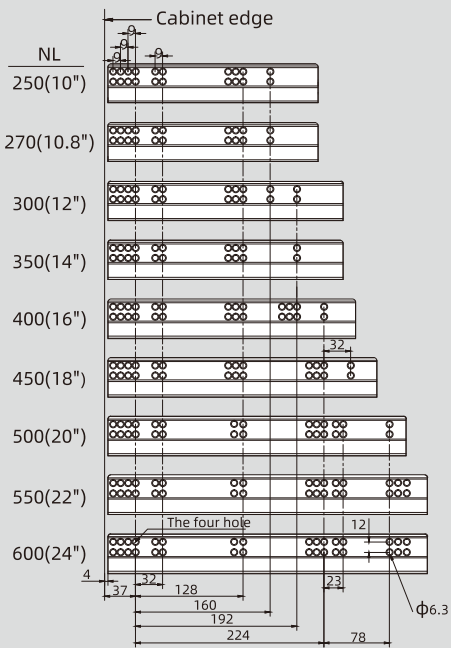


Front panel




Base panel



Back panel




Base panel and drilling



DRAWER SLIDES L/R	ITEM NO.	FUNCTION	SIDE PANELS L/R DECORATIVE COVERS L/R	ITEM NO.
	S32H650	Soft close		S50AH600D/M-250CB
	S32F651	Push open		S50AH600D/M-270CB
	S32F653	Push open with stabilizer bar		S50AH600D/M-300CB
	S32F653	Push open with stabilizer bar		S50AH600D/M-350CB
	S32F653	Push open with stabilizer bar		S50AH600D/M-400CB
	S39P650	Push open & soft close		S50AH600D/M-450CB
	S39P650	Push open & soft close		S50AH600D/M-500CB
	S39P650	Push open & soft close		S50AH600D/M-550CB

Side panel colors: D for grey, M for white

Accessories

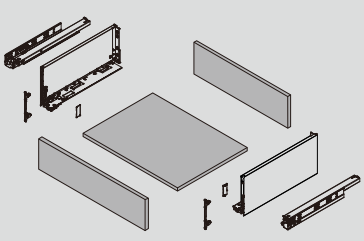




S50BL600
DREAM BOX (LOW DRAWER
- LED GLASS SIDE)

- Load capacity: 35kg
- Length: 250-600mm
- Height of drawer sides: 94mm
- Front panel width adjustment: ±1.2mm
- Front panel height adjustment: ±2mm
- Front panel tilt adjustment: -1.5,+4mm
- Drawer depth adjustment: 0-5mm




INSTALLATION PARAMETERS


LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth

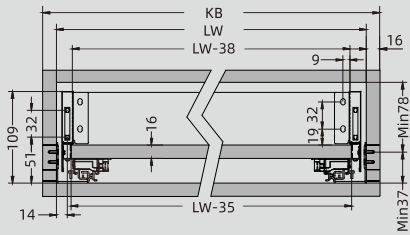


Front panel




Base panel




Back panel




Base panel and drilling



Standard drawer

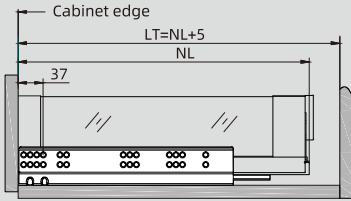


Hole position (mm)

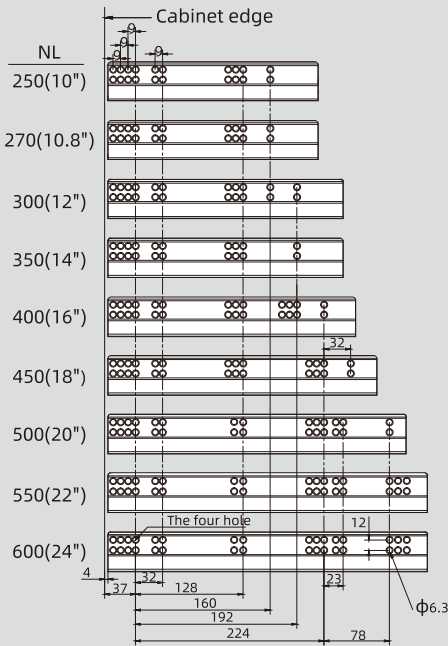

DRAWER SLIDES L/R	ITEM NO.	FUNCTION	SIDE PANELS L/R + GLASS DECORATIVE COVERS L/R	ITEM NO.
	S32H650	Soft close		S50BL600D/M-250CB
	S32F651	Push open		S50BL600D/M-270CB
	S32F653	Push open with stabilizer bar		S50BL600D/M-300CB
	S39P650	Push open & soft close		S50BL600D/M-350CB
				S50BL600D/M-400CB
				S50BL600D/M-450CB
				S50BL600D/M-500CB
				S50BL600D/M-550CB
				S50BL600D/M-600CB

Side panel colors: D for grey, M for white

Accessories

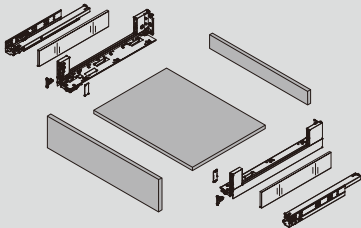


S50BM600
DREAM BOX (MEDIUM DRAWER
- LED GLASS SIDE)

- Load capacity: 35kg
- Length: 250-600mm
- Height of drawer sides: 132mm
- Front panel width adjustment: $\pm 1.2\text{mm}$
- Front panel height adjustment: $\pm 2\text{mm}$
- Front panel tilt adjustment: $-1.5, +4\text{mm}$
- Drawer depth adjustment: 0-5mm




INSTALLATION PARAMETERS

LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth


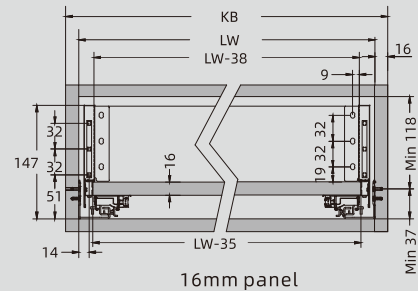


Standard drawer

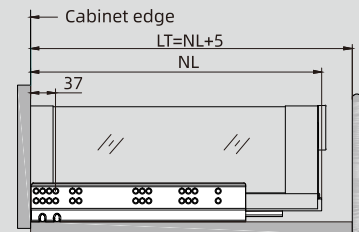


16mm panel

Hole position (mm)

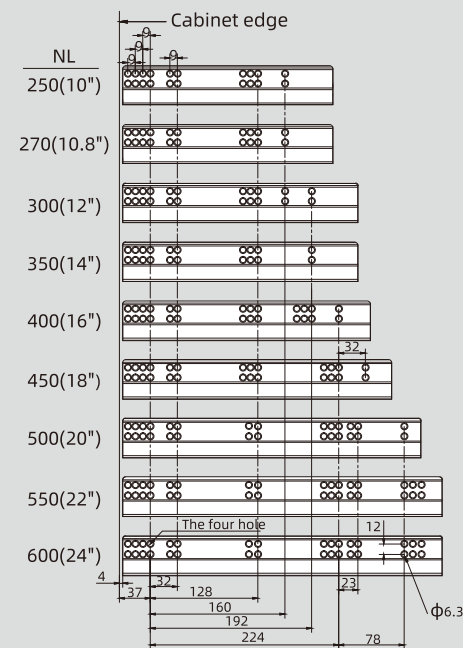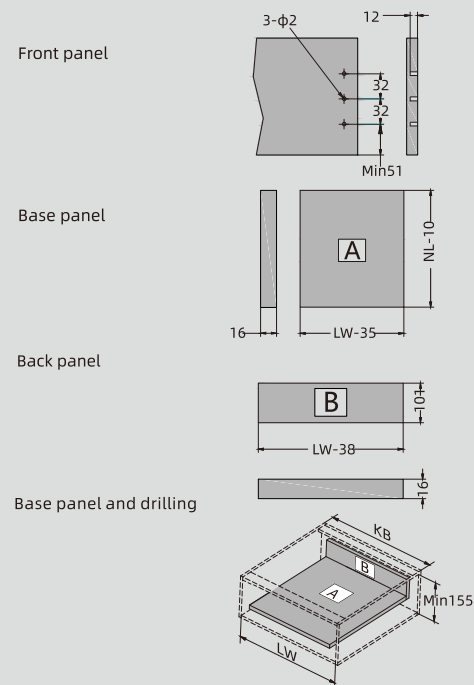

DRAWER SLIDES L/R	ITEM NO.	FUNCTION	SIDE PANELS L/R + GLASS DECORATIVE COVERS L/R	ITEM NO.
	S32H650	Soft close		S50BM600D/M-250CB
	S32F651	Push open		S50BM600D/M-270CB
	S32F653	Push open with stabilizer bar		S50BM600D/M-300CB
	S39P650	Push open & soft close		S50BM600D/M-350CB
				S50BM600D/M-400CB
				S50BM600D/M-450CB
				S50BM600D/M-500CB
				S50BM600D/M-550CB
				S50BM600D/M-600CB

Side panel colors: D for grey, M for white

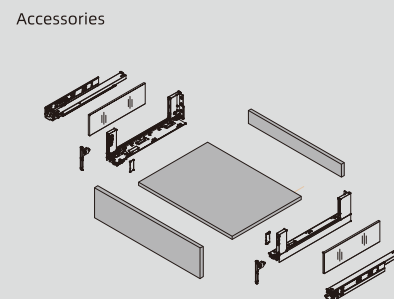


S50BH600
DREAM BOX (HIGH DRAWER
- LED GLASS SIDE)

- Load capacity: 35kg
- Length: 250-600mm
- Height of drawer sides: 179mm
- Front panel width adjustment: $\pm 1.2\text{mm}$
- Front panel height adjustment: $\pm 2\text{mm}$
- Front panel tilt adjustment: $-1.5, +4\text{mm}$
- Drawer depth adjustment: 0-5mm




INSTALLATION PARAMETERS

LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth


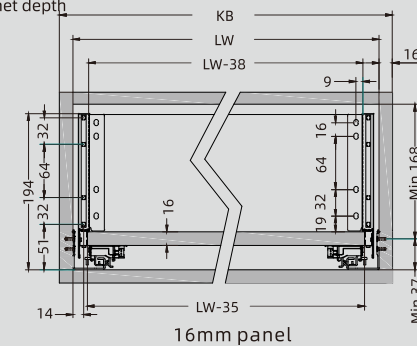


Standard drawer

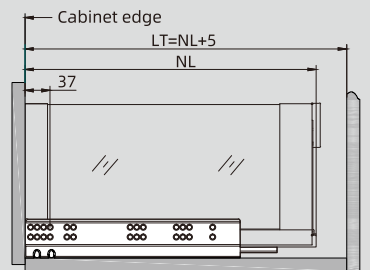


16mm panel

Hole position (mm)

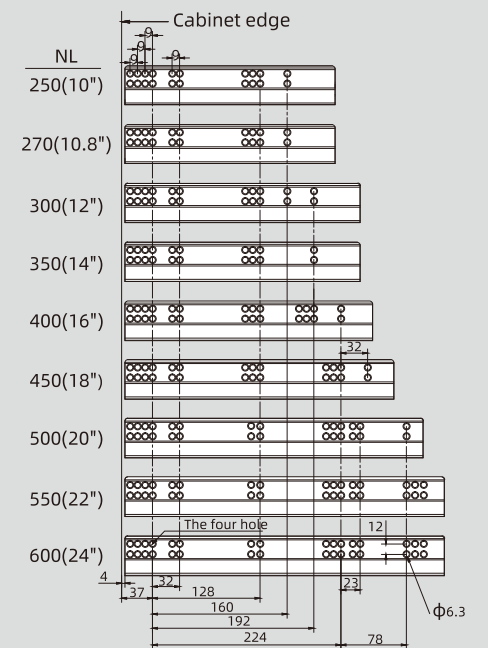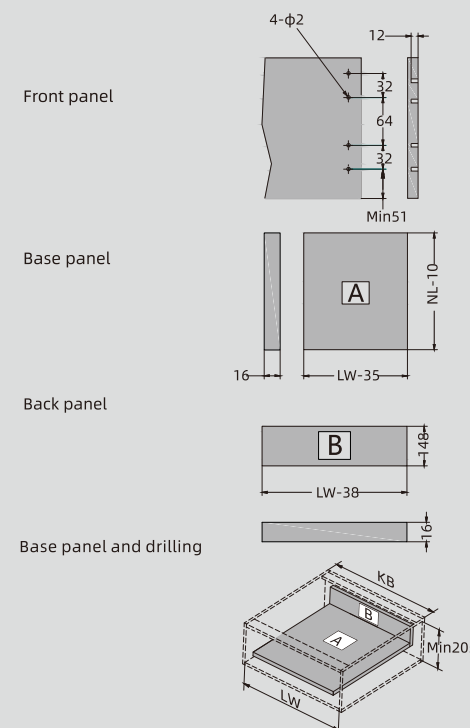

DRAWER SLIDES L/R	ITEM NO.	FUNCTION	SIDE PANELS L/R + GLASS DECORATIVE COVERS L/R	ITEM NO.
	S32H650	Soft close		S50BH600D/M-250CB
	S32F651	Push open		S50BH600D/M-270CB
	S32F653	Push open with stabilizer bar		S50BH600D/M-300CB
	S39P650	Push open & soft close		S50BH600D/M-350CB
				S50BH600D/M-400CB
		S50BH600D/M-450CB		
		S50BH600D/M-500CB		
		S50BH600D/M-550CB		
		S50BH600D/M-600CB		

Side panel colors: D for grey, M for white

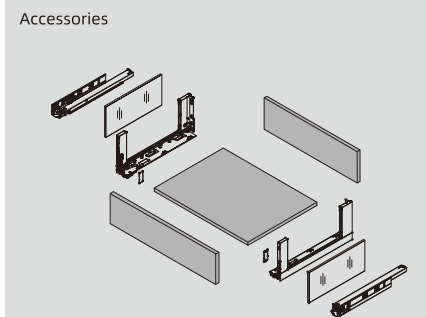

S50A DOUBLE WALL DRAWER (METAL SIDE PANEL)
INSTALLTION INSTRUCTION

S50A LOW DRAWER HEIGHT L = 95.5

Internal cabinet space

Front connectors installation size

Front panel drilling size

Back panel installation size

S50A MEDIUM DRAWER HEIGHT M = 133.5

Internal cabinet space

Front connectors installation size

Front panel drilling size

Back panel installation size

S50A HIGH DRAWER HEIGHT H = 180.5

Internal cabinet space

Front connectors installation size

Front panel drilling size

Back panel installation size

S50A DOUBLE WALL DRAWER (METAL SIDE PANEL)
INSTALLTION INSTRUCTION

S50A DRAWER INSTALLATION

ST4x16mm self tapping screws

ST4x16mm self tapping screws

ST4x18mm self tapping screws

Two sides keep abreast

Base panel installation

Front panel connectors installation

Front panel installation

Slide the drawer into the cabinet

S50A DRAWER ADJUSTMENT INSTALLATION

Front panel height adjustment ±2mm

Front panel width adjustment ±1.2mm

Front panel tilt adjustment -1.5,+4mm

Drawer depth adjustment 0-5mm

Decorative covers installation

S50A DRAWER DISASSEMBLY INSTALLATION

Decorative covers disassembly

Front panel disassembly

Drawer disassembly

S50B DOUBLE WALL DRAWER (GLASS SIDE PANEL)
INSTALLTION INSTRUCTION

S50B LOW DRAWER HEIGHT L = 94

Internal cabinet space

Front connectors installation size

Front panel drilling size

Back panel installation size

S50B MEDIUM DRAWER HEIGHT M = 132

Internal cabinet space

Front connectors installation size

Front panel drilling size

Back panel installation size

S50B HIGH DRAWER HEIGHT H = 179

Internal cabinet space

Front connectors installation size

Front panel drilling size

Back panel installation size

S50B DOUBLE WALL DRAWER (GLASS SIDE PANEL)
INSTALLTION INSTRUCTION

S50B DRAWER INSTALLATION

ST4x16mm self tapping screws

ST4x16mm self tapping screws

ST4x18mm self tapping screws

S50B DRAWER ADJUSTMENT INSTALLATION

S50B DRAWER DISASSEMBLY INSTALLATION


S50NL600-DREAM BOX
(LOW INNER DRAWER)

• Height of boxside: 95.5mm



FRONT CONNECTORS L/R + FRONT PANEL	ITEM NO.
	S50NL600D/M-600
	S50NL600D/M-800
	S50NL600D/M-900
	S50NL600D/M-1000
	S50NL600D/M-1200

Side panel colors: D for grey, M for white

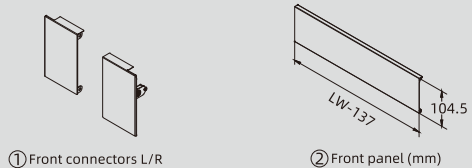


S50GL600-DREAM BOX
(LOW INNER DRAWER WITH GLASS FRONT PANEL)

• Height of boxside: 95.5mm



FRONT CONNECTORS L/R + FRONT PANEL + GLASS FRONT PANEL	ITEM NO.
	S50GL600D/M-600
	S50GL600D/M-800
	S50GL600D/M-900
	S50GL600D/M-1000
	S50GL600D/M-1200

Side panel colors: D for grey, M for white

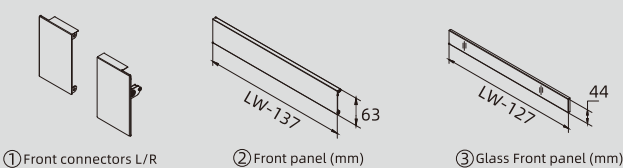


S50NM600-DREAM BOX
(MEDIUM INNER DRAWER WITH SQUARE RAIL)

• Height of boxside: 133.5mm



FRONT CONNECTORS L/R + FRONT PANEL + SQUARE RAIL	ITEM NO.
	S50NM600D/M-600
	S50NM600D/M-800
	S50NM600D/M-900
	S50NM600D/M-1000
	S50NM600D/M-1200

Side panel colors: D for grey, M for white

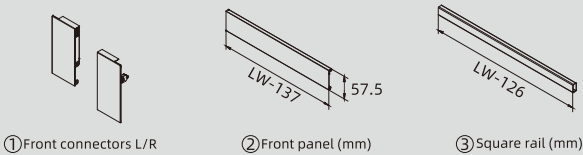


S50GM600-DREAM BOX
(MEDIUM INNER DRAWER WITH GLASS FRONT PANEL)

• Height of boxside: 133.5mm



FRONT CONNECTORS L/R + FRONT PANEL + GLASS FRONT PANEL	ITEM NO.
	S50GM600D/M-600
	S50GM600D/M-800
	S50GM600D/M-900
	S50GM600D/M-1000
	S50GM600D/M-1200

Side panel colors: D for grey, M for white

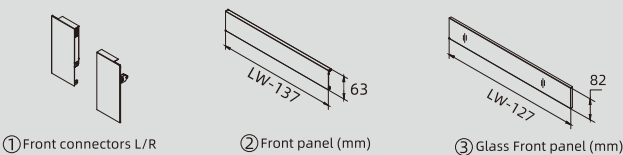


S50NH600-DREAM BOX
(HIGH INNER DRAWERWITH SQUARE RAIL)

• Height of boxside: 180.5mm



FRONT CONNECTORS L/R + FRONT PANEL + SQUARE RAIL	ITEM NO.
	S50NH600D/M-600
	S50NH600D/M-800
	S50NH600D/M-900
	S50NH600D/M-1000
	S50NH600D/M-1200

Side panel colors: D for grey, M for white

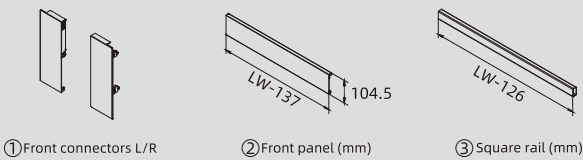


S50GH600-DREAM BOX
(HIGH INNER DRAWER WITH GLASS FRONT PANEL)

• Height of boxside: 180.5mm




FRONT CONNECTORS L/R + FRONT PANEL + GLASS FRONT PANEL	ITEM NO.
	S50GH600D/M-600
	S50GH600D/M-800
	S50GH600D/M-900
	S50GH600D/M-1000
	S50GH600D/M-1200

Side panel colors: D for grey, M for white

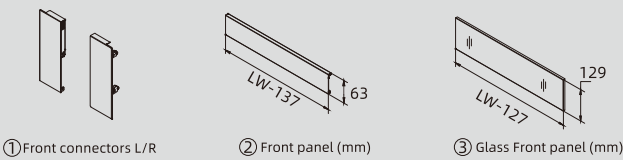



INNER DRAWER FRONT PANEL
INSTALLTION INSTRUCTION

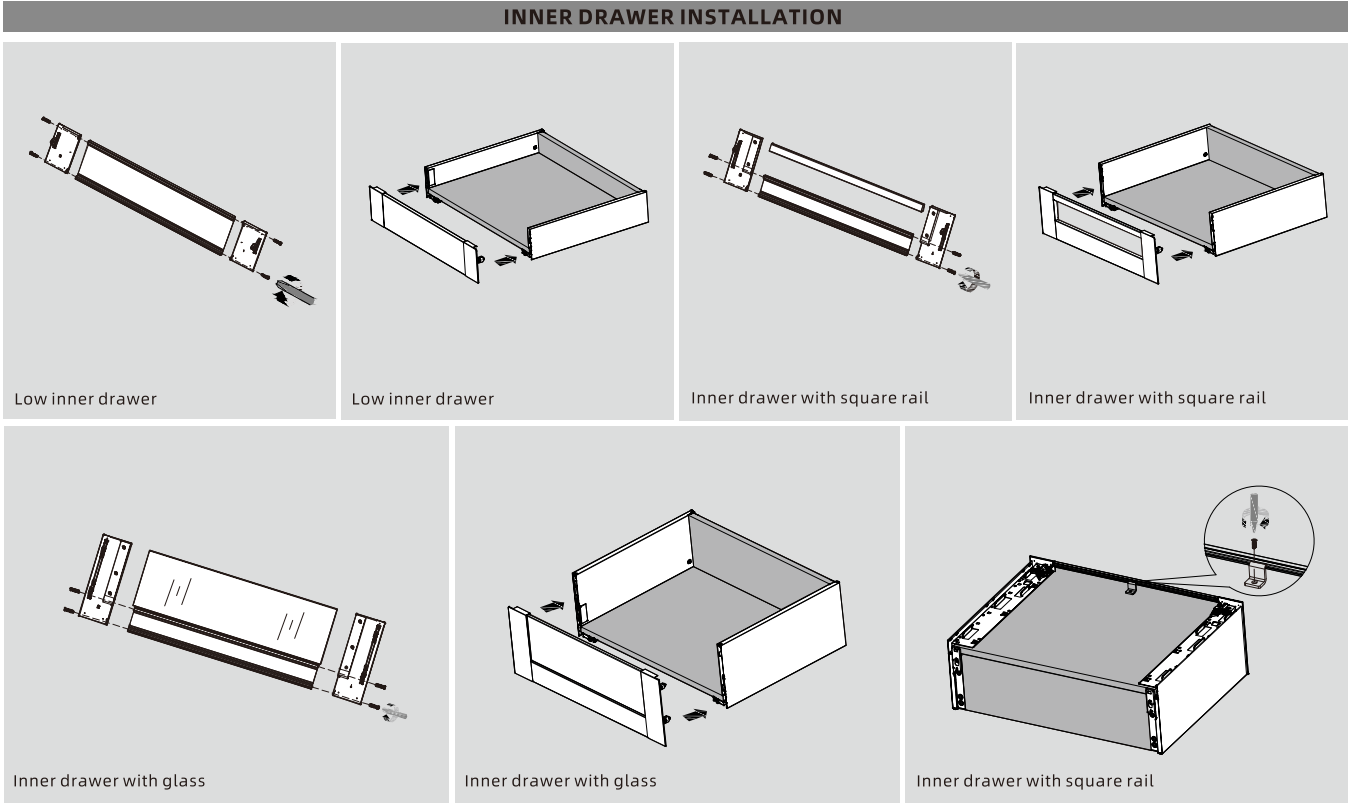

S50A
SQUARE BARS L/R




S50A-DT01
LIGHTING SYSTEM FOR METAL DRAWER

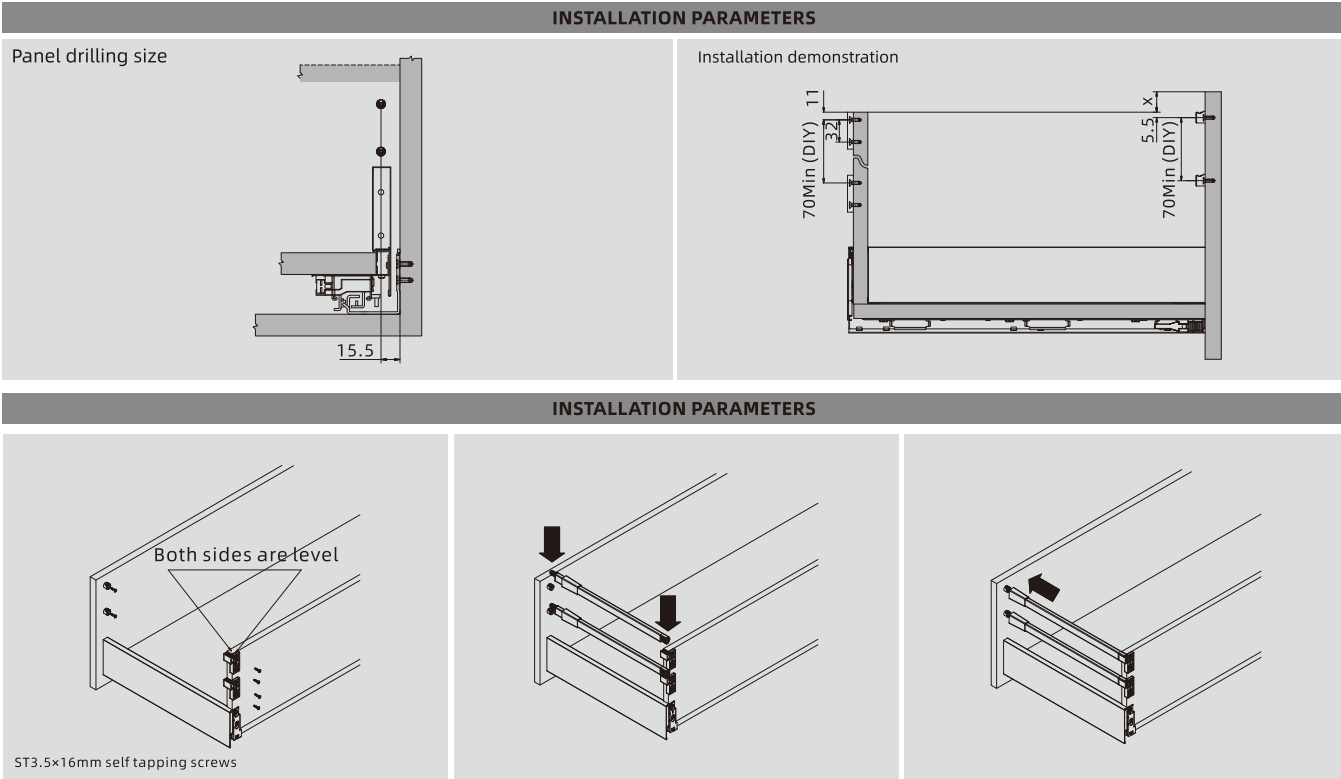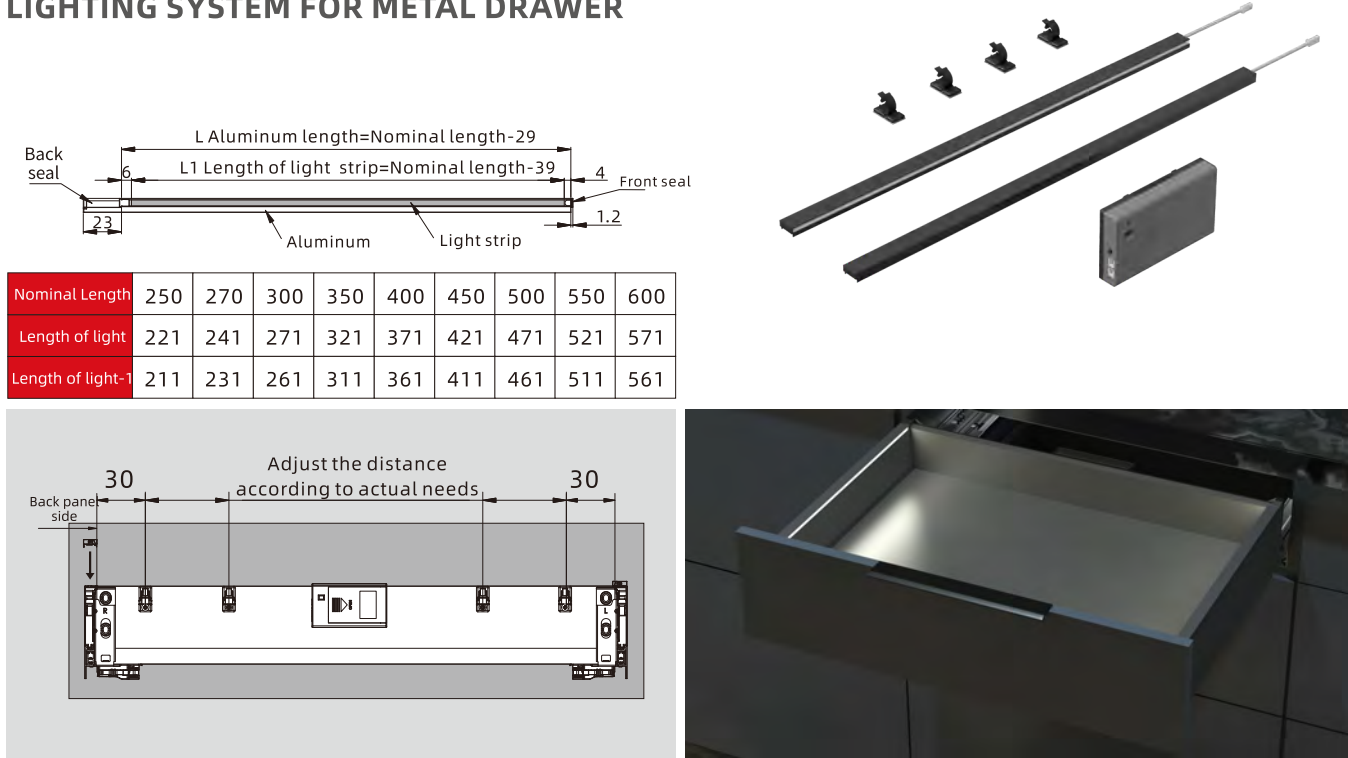





S50
DIVIDER INSTALLATION
INSTRUCTION

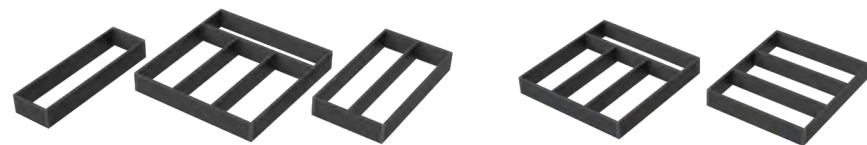

PROCESSED ALUMINUM RAIL

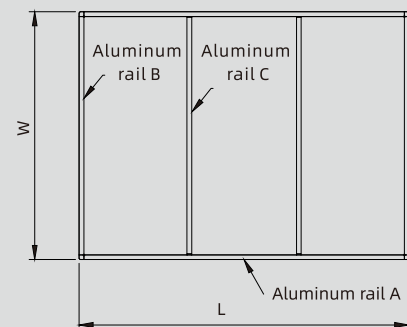


As shown in the picture
Aluminum rail A size = L-12mm
Aluminum rail B size = W-12mm
Aluminum rail C size = W-14.5mm
The installation layout above is for reference.
The specific layout can be arranged according to actual needs.

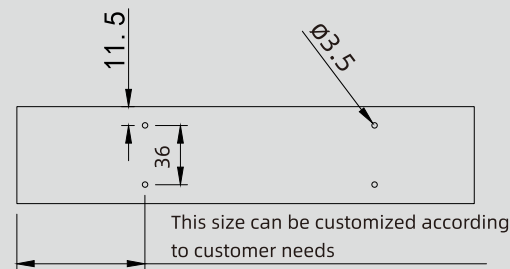

Drill the aluminum rail A as shown in the picture.


PRODUCT INSTALLATION

Install the product as shown in the picture.

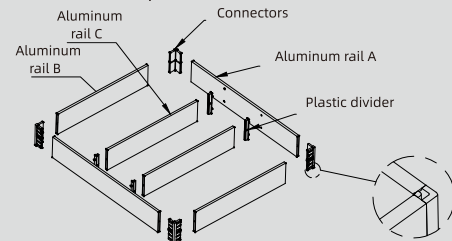

When install the connectors, pay attention
this side is the bottom side.

Complete product installation





This layout is for reference. The actual layout can be
DIY customized according to the requirement.

S50A
SQUARE BARS DIVIDER
INSTALLATION INSTRUCTION





PRODUCT INSTALLATION

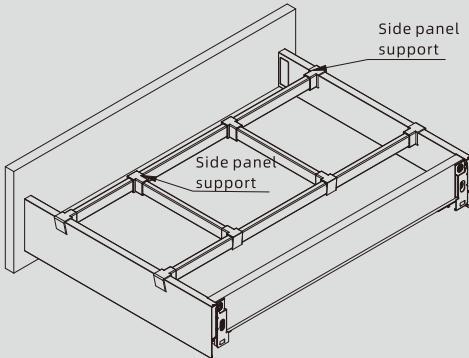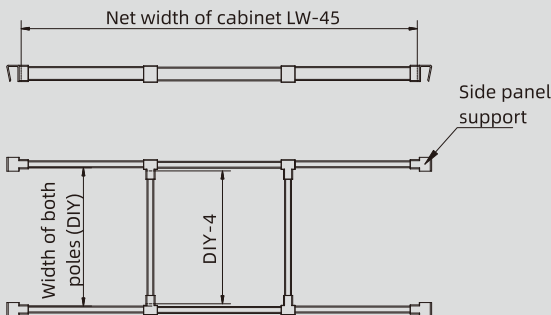

S50A
SQUARE BARS(X-HIGHT) DIVIDER
INSTALLATION INSTRUCTION




PRODUCT INSTALLATION

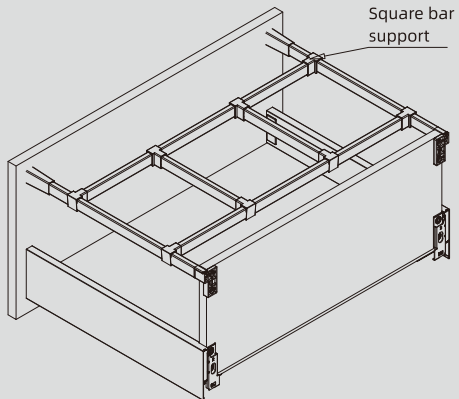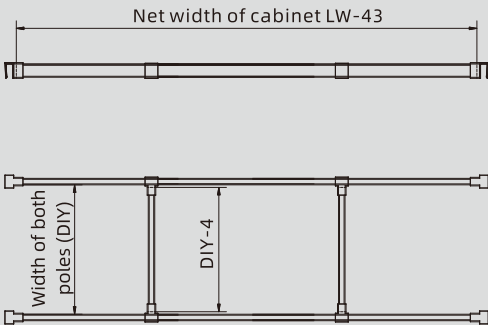

S50B
SQUARE BARS DIVIDER INSTALLATION
INSTRUCTION



PRODUCT INSTALLATION

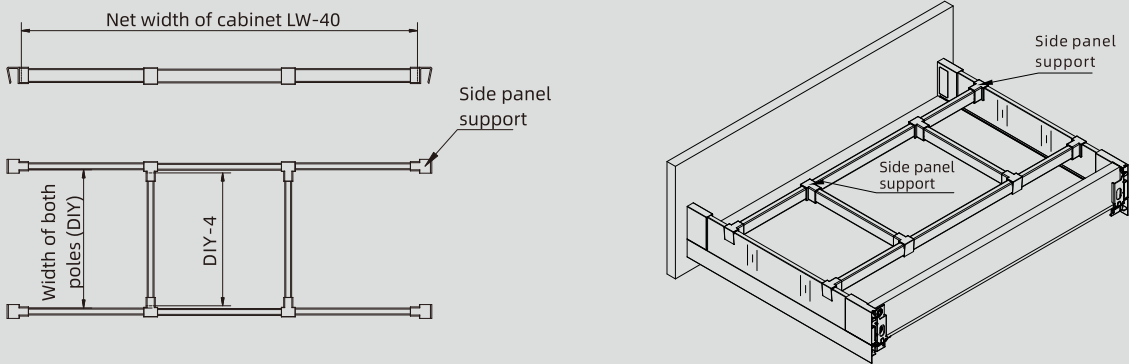


S91AM600
SLIM DOUBLE WALL DRAWER
(MEDIUM DRAWER)

- Load capacity: 35kg
- Length: 270-550mm
- Height of side panels: 75mm
- Front panel width adjustment: ± 1 mm
- Front panel height adjustment: ± 2 mm
- Front panel tilt adjustment: $-2.5, +4$ mm




INSTALLATION PARAMETERS


LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth

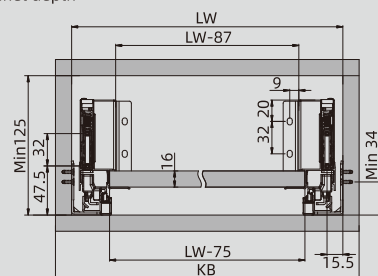


16mm panel

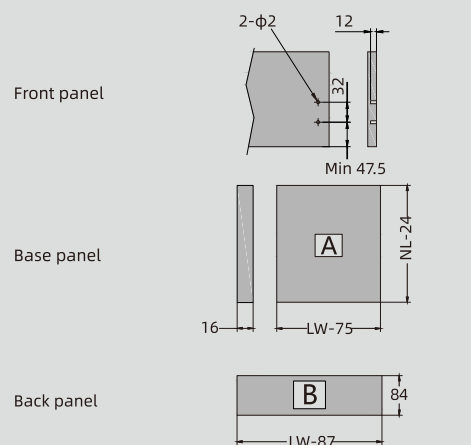

Base panel and drilling




Standard drawer

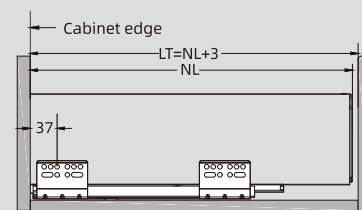

16mm panel


Hole position (mm)

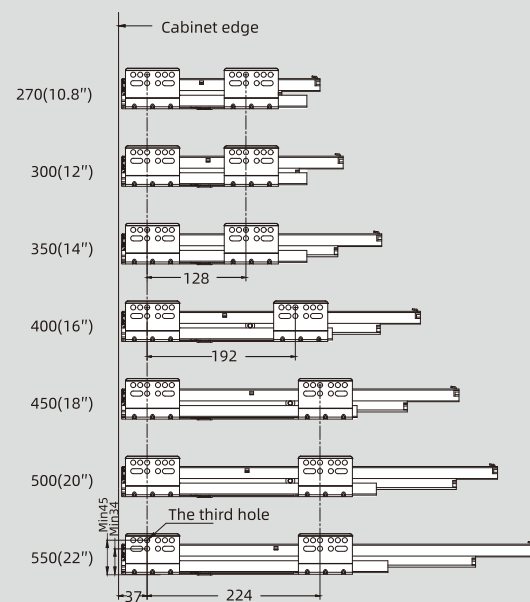

ITEM NO.	SIDE PANELS L/R DECORATIVE COVERS L/R	DRAWER SLIDES L/R	FRONT CONNECTORS L/R	BACK PANEL FASTENERS L/R
591AM600G/W-270				
591AM600G/W-300				
591AM600G/W-350				
591AM600G/W-400				
591AM600G/W-450				
591AM600G/W-500				
591AM600G/W-550				

Side panel colors: W for White, G for Grey. Share the same inner drawers with the S90A series

Accessories




S91AH600
SLIM DOUBLE WALL DRAWER
(HIGH DRAWER)

- Load capacity: 35kg
- Length: 270-550mm
- Height of side panels: 122mm
- Front panel width adjustment: $\pm 1\text{mm}$
- Front panel height adjustment: $\pm 2\text{mm}$
- Front panel tilt adjustment: $-2.5, +4\text{mm}$




INSTALLATION PARAMETERS


LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth

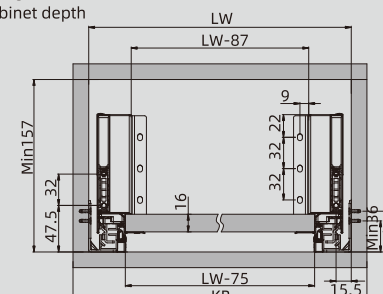


16mm panel

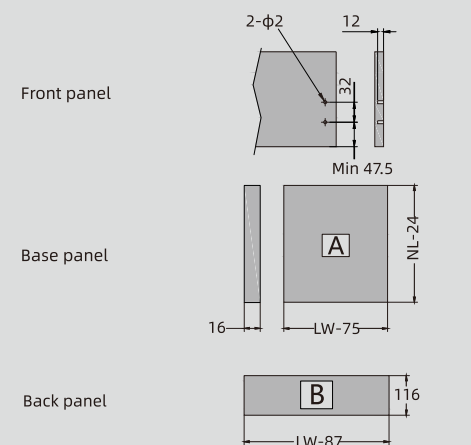

Base panel and drilling




Standard drawer

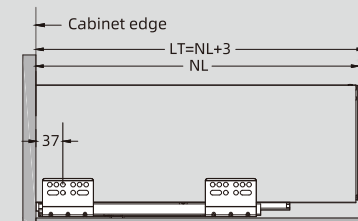

16mm panel


Hole position (mm)

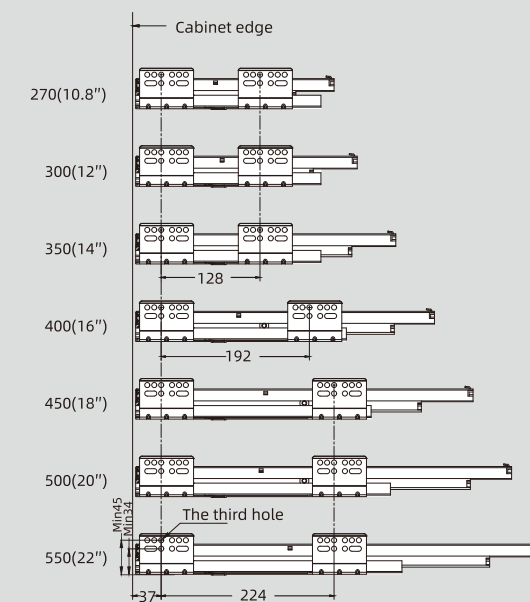

ITEM NO.	SIDE PANELS L/R DECORATIVE COVERS L/R	DRAWER SLIDES L/R	FRONT CONNECTORS L/R	BACK PANEL FASTENERS L/R
S91AH600G/W-270				
S91AH600G/W-300				
S91AH600G/W-350				
S91AH600G/W-400				
S91AH600G/W-450				
S91AH600G/W-500				
S91AH600G/W-550				

Side panel colors: W for White, G for Grey. Share the same inner drawers with the S90A series

Accessories




S91AK600
SLIM DOUBLE WALL DRAWER
(EXTRA-HIGH DRAWER)

- Load capacity: 35kg
 - Length: 270-550mm
 - Height of side panels: 172mm
- Front panel width adjustment: ±1mm
 - Front panel height adjustment: ±2mm
 - Front panel tilt adjustment: -2.5,+4mm




INSTALLATION PARAMETERS


LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth

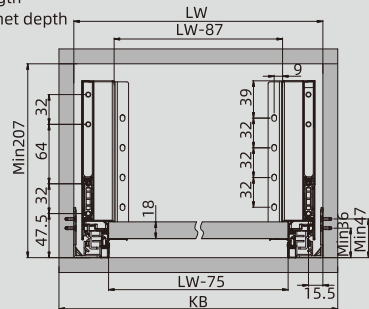

16mm panel

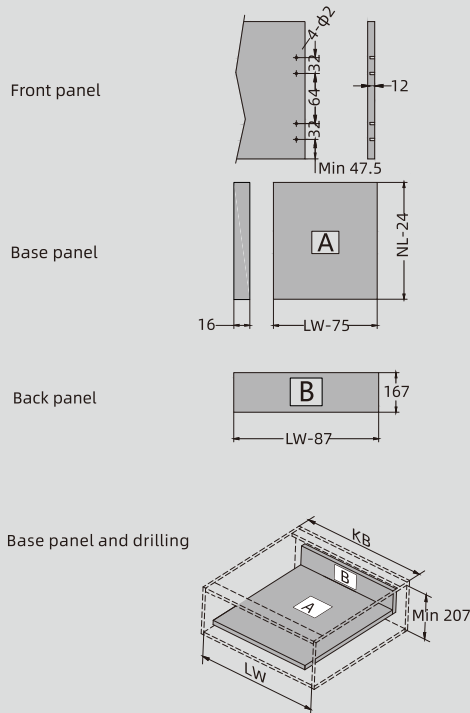


Standard drawer



16mm panel


Hole position (mm)

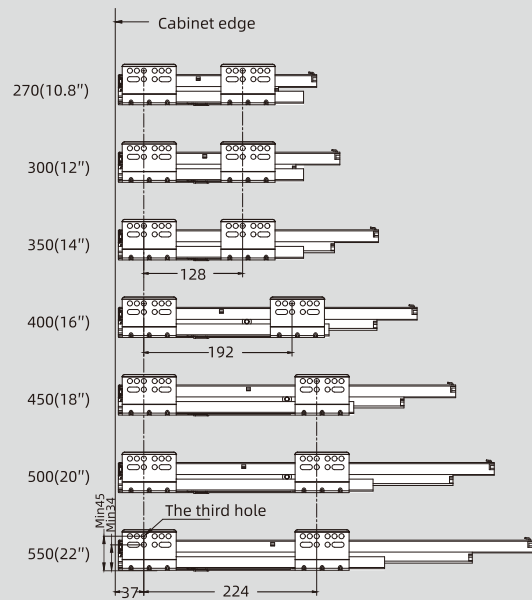

ITEM NO.	SIDE PANELS L/R DECORATIVE COVERS L/R	DRAWER SLIDES L/R	FRONT CONNECTORS L/R	BACK PANEL FASTENERS L/R
S91AK600G/W-270				
S91AK600G/W-300				
S91AK600G/W-350				
S91AK600G/W-400				
S91AK600G/W-450				
S91AK600G/W-500				
S91AK600G/W-550				

Side panel colors: W for White, G for Grey. Share the same inner drawers with the S90A series

Accessories

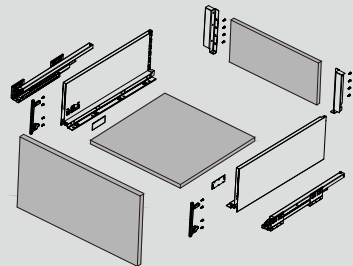


S91AQ600
SLIM DOUBLE WALL DRAWER
(ULTRA-HIGH DRAWER)

- Load capacity: 35kg
 - Length: 270-550mm
 - Height of side panels: 203mm
- Front panel width adjustment: ±1mm
 - Front panel height adjustment: ±2mm
 - Front panel tilt adjustment: -2.5,+4mm




INSTALLATION PARAMETERS


LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth

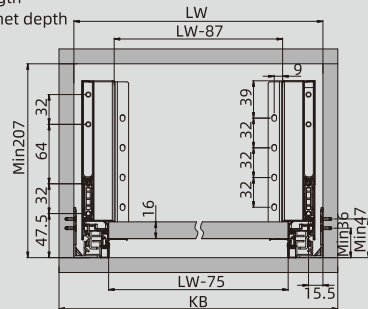

16mm panel

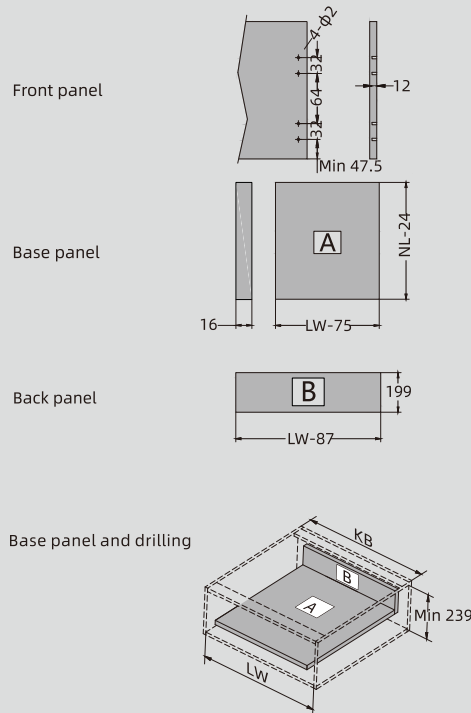


Standard drawer

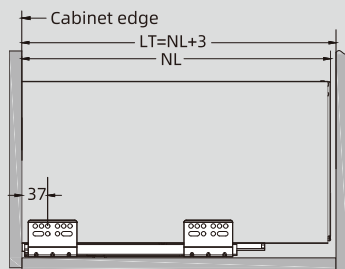

16mm panel


Hole position (mm)

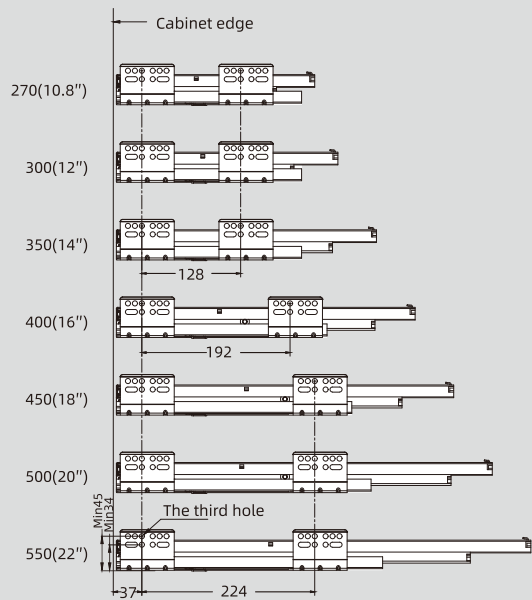

ITEM NO.	SIDE PANELS L/R DECORATIVE COVERS L/R	DRAWER SLIDES L/R	FRONT CONNECTORS L/R	BACK PANEL FASTENERS L/R
S91AQ600G/W-270				
S91AQ600G/W-300				
S91AQ600G/W-350				
S91AQ600G/W-400				
S91AQ600G/W-450				
S91AQ600G/W-500				
S91AQ600G/W-550				

Side panel colors: W for White, G for Grey. Share the same inner drawers with the S90A series

Accessories

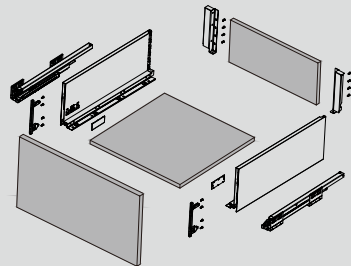

S91A SLIM DOUBLE WALL DRAWER
INSTALLTION INSTRUCTION

S91A MEDIUM DRAWER HEIGHT = 90

Internal cabinet space

Front connectors installation size

Front panel drilling size

Back panel installation size

S91A HIGH DRAWER HEIGHT = 122

Internal cabinet space

Front connectors installation size

Front panel drilling size

Back panel installation size

S91A EXTRA-HIGH DRAWER HEIGHT = 172

Internal cabinet space

Front connectors installation size

Front panel drilling size

Back panel installation size

S91A ULTRA-HIGH DRAWER HEIGHT = 203

Internal cabinet space

Front connectors installation size

Front panel drilling size

Back panel installation size

S91A SLIM DOUBLE WALL DRAWER
INSTALLTION INSTRUCTION

S91A MEDIUM/HIGH DRAWER INSTALLATON

S91A EXTRA-HIGH / ULTRA-HIGH DRAWER INSTALLATON

S91A MEDIUM / HIGH DRAWER DISASSEMBLE

S91A EXTRA-HIGH / ULTRA-HIGH DRAWER DISASSEMBLE

S91A MEDIUM / HIGH DRAWER INSTALLATION

S91A EXTRA-HIGH / ULTRA-HIGH DRAWER INSTALLATION

S91A MEDIUM / HIGH / EXTRA-HIGH / ULTRA-HIGHDRAWER FRONT PANEL TILT ADJUSTMENT


Front panel tilt adjustment: +4~-2.5mm

033

034


S90NM600
SLIM DOUBLE WALL INNER DRAWER
(MEDIUM INNER DRAWER)

• Height of side panels: 90mm



FRONT CONNECTORS L/R + FRONT PANEL	ITEM NO.
	S90NM600G/W-600
	S90NM600G/W-800
	S90NM600G/W-900
	S90NM600G/W-1000
	S90NM600G/W-1200

Side panel colors: W for White, G for Grey

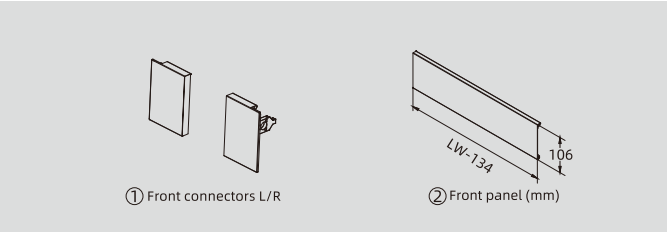


S90NQ600
SLIM DOUBLE WALL INNER DRAWER
(ULTRA-HIGH INNER DRAWER)

• Height of side panels: 204mm



FRONT CONNECTORS L/R + FRONT PANEL	ITEM NO.
	S90NQ600G/W-600
	S90NQ600G/W-800
	S90NQ600G/W-900
	S90NQ600G/W-1000
	S90NQ600G/W-1200

Side panel colors: W for White, G for Grey

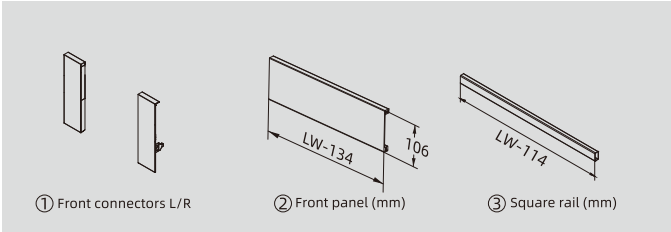


S90NH600
SLIM DOUBLE WALL INNER DRAWER
(HIGH INNER DRAWER)

• Height of side panels: 122mm



FRONT CONNECTORS L/R + FRONT PANEL + SQUARE RAIL	ITEM NO.
	S90NH600G/W-600
	S90NH600G/W-800
	S90NH600G/W-900
	S90NH600G/W-1000
	S90NH600G/W-1200

Side panel colors: W for White, G for Grey

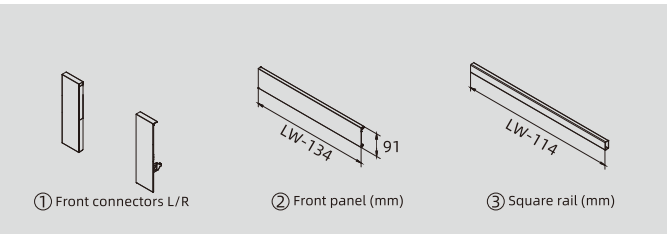


S90GK600
GLASS SLIM DOUBLE WALL INNER DRAWER
(EXTRA-HIGH INNER DRAWER)

• Height of side panels: 172mm



FRONT CONNECTORS L/R + FRONT PANEL	ITEM NO.
	S90GK600G/W-600
	S90GK600G/W-800
	S90GK600G/W-900
	S90GK600G/W-1000
	S90GK610G/W-1200

Side panel colors: W for White, G for Grey

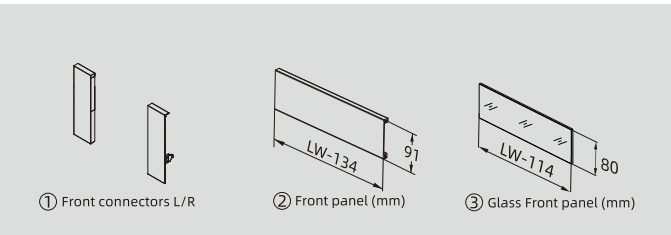


S90NK600
SLIM DOUBLE WALL INNER DRAWER
(EXTRA-HIGH INNER DRAWER)

• Height of side panels: 172mm



FRONT CONNECTORS L/R + FRONT PANEL	ITEM NO.
	S90NK600G/W-600
	S90NK600G/W-800
	S90NK600G/W-900
	S90NK600G/W-1000
	S90NK600G/W-1200

Side panel colors: W for White, G for Grey

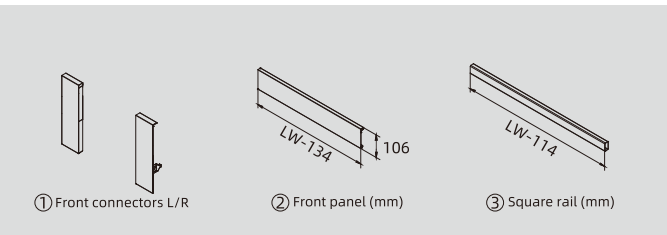


S90GQ600
GLASS SLIM DOUBLE WALL INNER DRAWER
(ULTRA-HIGH INNER DRAWER)

• Height of side panels: 204mm






FRONT CONNECTORS L/R + FRONT PANEL	ITEM NO.
	S90GQ600G/W-600
	S90GQ600G/W-800
	S90GQ600G/W-900
	S90GQ600G/W-1000
	S90GQ600G/W-1200

Side panel colors: W for White, G for Grey



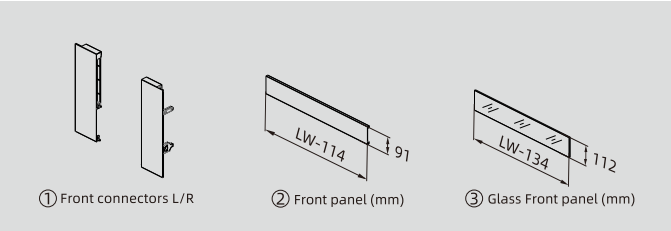


S90 INNER DRAWER FRONT PANLE
INSTALLTION INSTRUCTION




S90A/S91A MEDIUM INNER DRAWER INSTALLATON

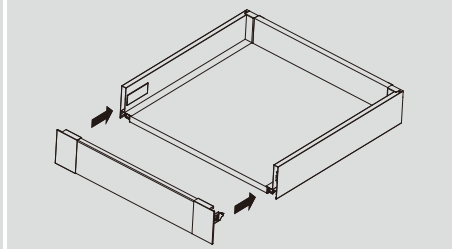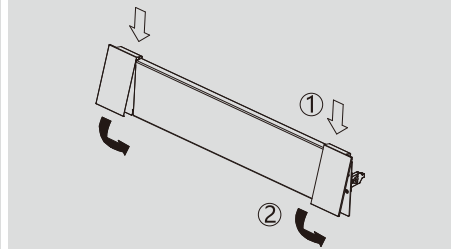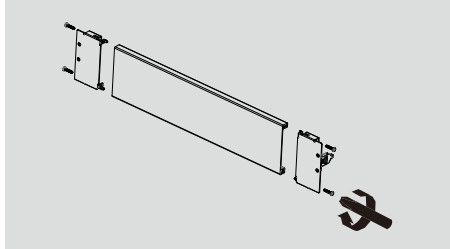




S90A/S91A HIGH INNER DRAWER INSTALLATION

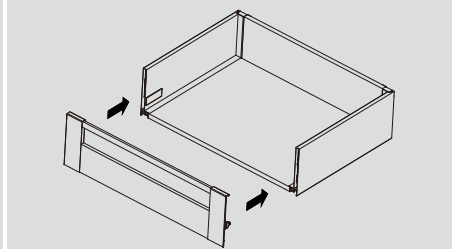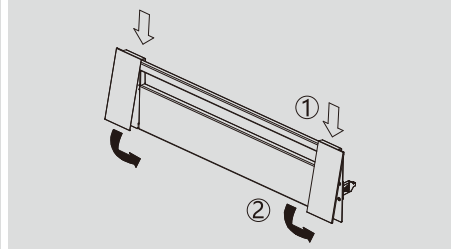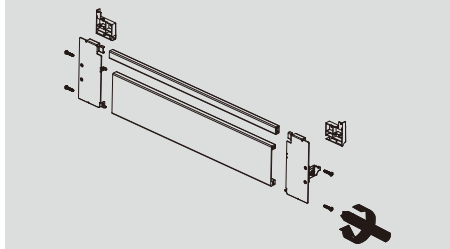




S90A/S91A EXTRA-HIGH INNER DRAWER INSTALLATION

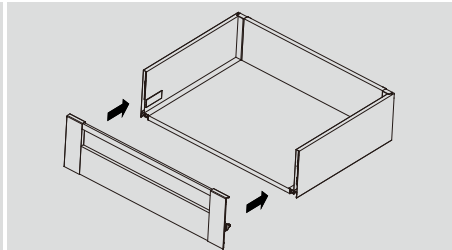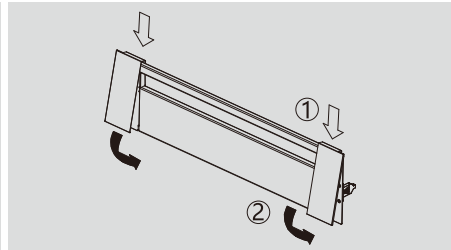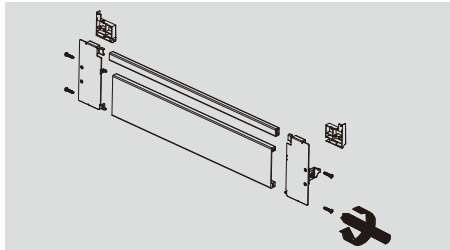




S90A/S91A ULTRA-HIGH INNER DRAWER INSTALLATION

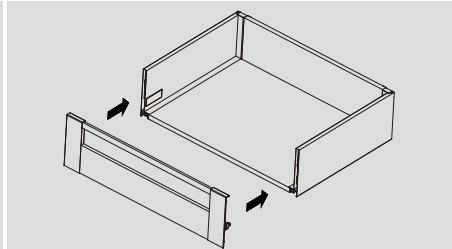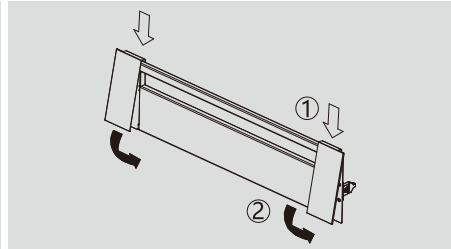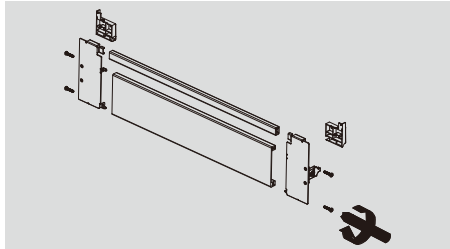

S90A/S91A EXTRA-HIGH GLASS INNER DRAWER INSTALLATION

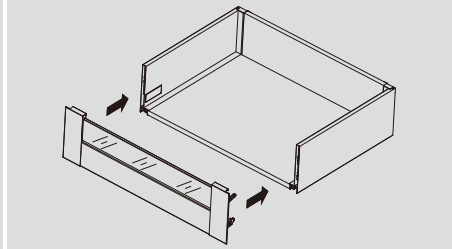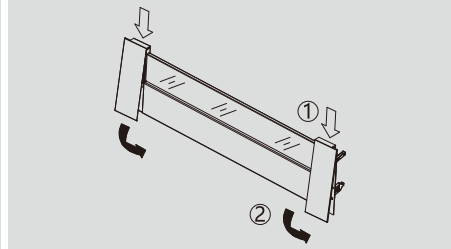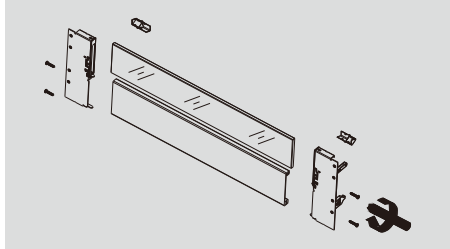

S90A/S91A ULTRA-HIGH GLASS INNER DRAWER INSTALLATION

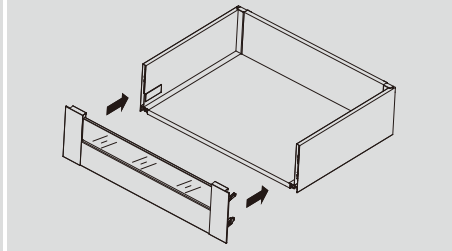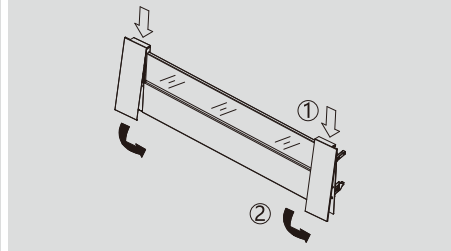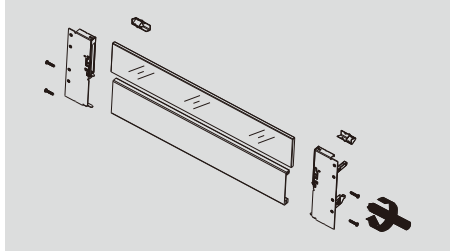


S90
SQUARE BARS L/R




INSTALLATION PARAMETERS


Panel drilling size



Installation demonstration





INSTALLATION PARAMETERS




Both sides are level



ST3.5x16mm self tapping screws



S90A-DT01
LIGHTING SYSTEM FOR METAL DRAWER

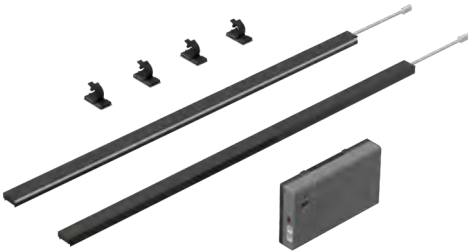

Nominal Length	10.8"	12"	14"	16"	18"	20"	22"	24"
	270	300	350	400	450	500	550	600
Length of light	241	271	321	371	421	471	521	571
Length of light-1	231	261	311	361	411	461	511	561

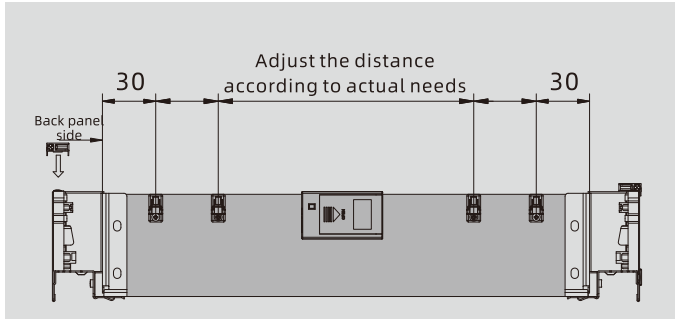




S90BM600
GLASS SLIM DOUBLE WALL DRAWER
(MEDIUM DRAWER)

- Load capacity: 35kg
 - Length: 270-550mm
 - Height of side panels: 90mm
- Front panel width adjustment: ±1mm
 - Front panel height adjustment: ±2mm




INSTALLATION PARAMETERS

LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth

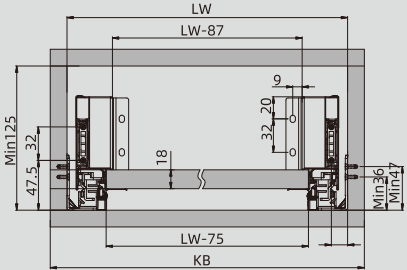


18mm panel

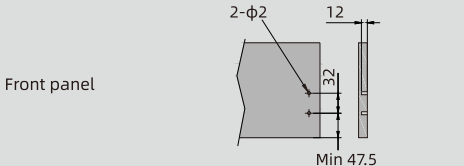


Front panel



Base panel




Back panel

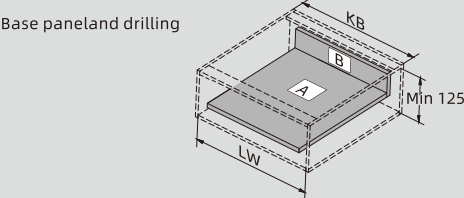


Base panel and drilling

Standard drawer

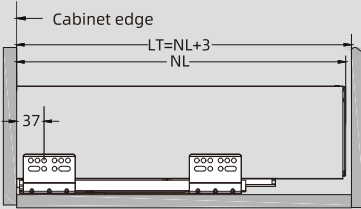

18mm panel


Hole position (mm)

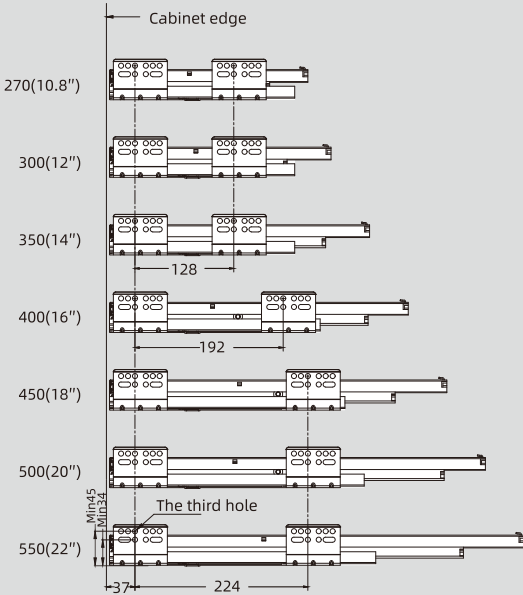

ITEM NO.	SIDES PANELS L/R + DECORATIVE COVERS L/R + GLASS	DRAWER SLIDES L/R	FRONT CONNECTORS L/R	BACK PANEL FASTENERS L/R
S90BM600G/W-270				
S90BM600G/W-300				
S90BM600G/W-350				
S90BM600G/W-400				
S90BM600G/W-450				
S90BM600G/W-500				
S90BM600G/W-550				

Side panel colors: W for White, G for Grey

Accessories

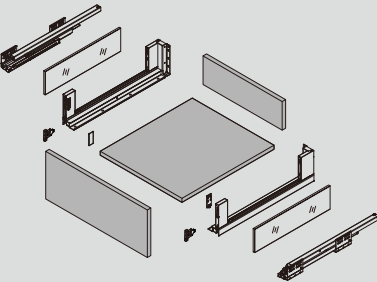


S90BH600
GLASS SLIM DOUBLE WALL DRAWER
(HIGH DRAWER)

- Load capacity: 35kg
- Length: 270-550mm
- Height of side panels: 122mm
- Front panel width adjustment: $\pm 1\text{mm}$
- Front panel height adjustment: $\pm 2\text{mm}$






INSTALLATION PARAMETERS

LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth

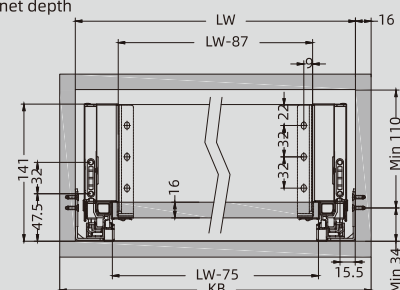


18mm panel

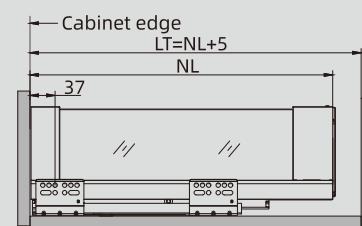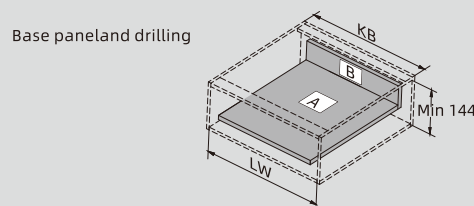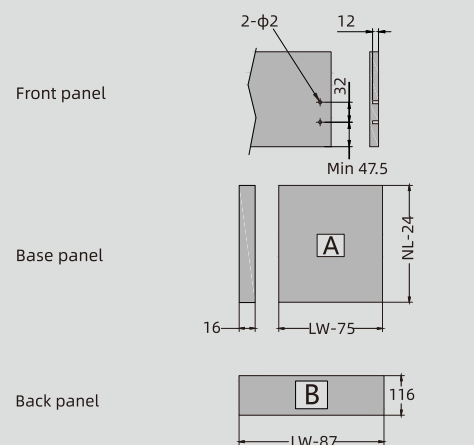



18mm panel

Hole position (mm)

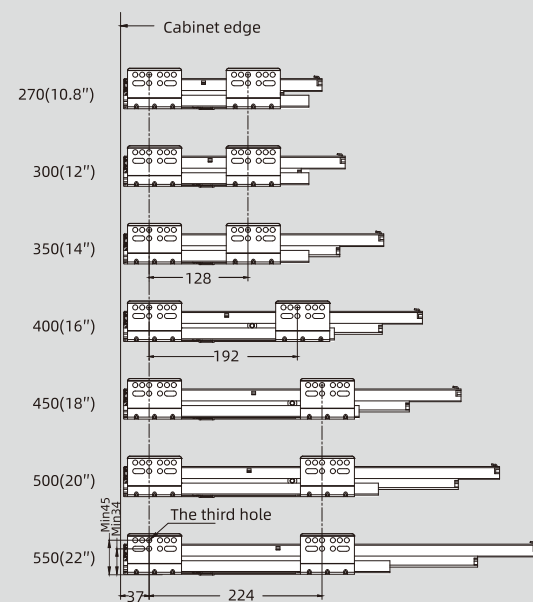

ITEM NO.	SIDE PANELS L/R DECORATIVE COVERS L/R	DRAWER SLIDES L/R	FRONT CONNECTORS L/R	BACK PANEL FASTENERS L/R
S90BH600G/W-270				
S90BH600G/W-300				
S90BH600G/W-350				
S90BH600G/W-400				
S90BH600G/W-450				
S90BH600G/W-500				
S90BH600G/W-550				

Side panel colors: W for White, G for Grey

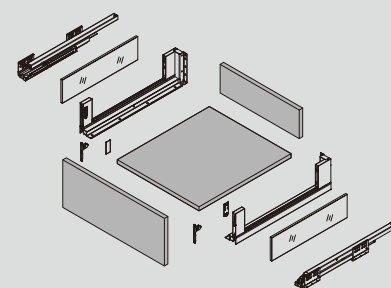


S90BK600
GLASS SLIM DOUBLE WALL DRAWER
(EXTRA-HIGH DRAWER)

- Load capacity: 35kg
- Length: 270-550mm
- Height of side panels: 172mm
- Front panel width adjustment: $\pm 1\text{mm}$
- Front panel height adjustment: $\pm 2\text{mm}$






INSTALLATION PARAMETERS

LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth

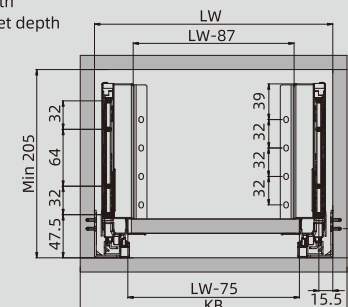


18mm panel

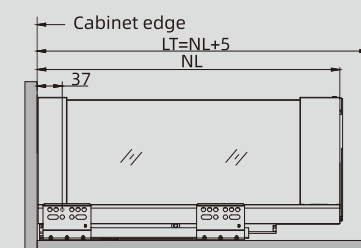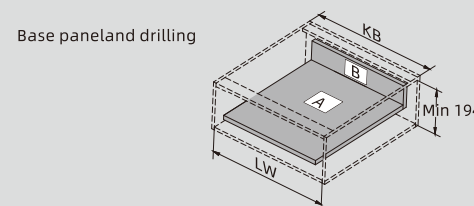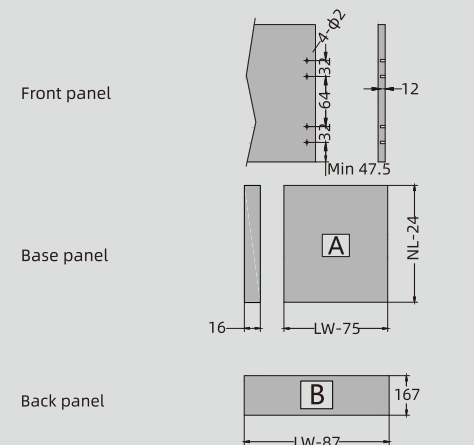



18mm panel

Hole position (mm)

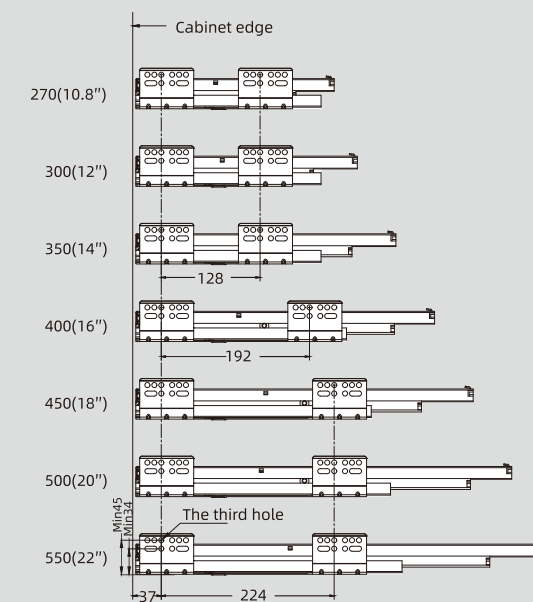

ITEM NO.	SIDE PANELS L/R DECORATIVE COVERS L/R	DRAWER SLIDES L/R	FRONT CONNECTORS L/R	BACK PANEL FASTENERS L/R
S90BK600G/W-270				
S90BK600G/W-300				
S90BK600G/W-350				
S90BK600G/W-400				
S90BK600G/W-450				
S90BK600G/W-500				
S90BK600G/W-550				

Side panel colors: W for White, G for Grey

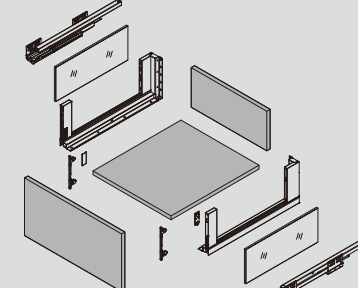

S90B SLIM DOUBLE WALL DRAWER (GLASS SIDE SERIES)
INSTALLTION INSTRUCTION

S90B MEDIUM DRAWER HEIGHT = 90

Internal cabinet space

Front connectors installation size

Front panel drilling size

Rear panel installation size

S90B HIGH DRAWER HEIGHT = 122

Internal cabinet space

Front connectors installation size

Front panel drilling size

Rear panel installation size

S90B EXTRA-HIGH DRAWER HEIGHT = 172

Internal cabinet space

Front connectors installation size

Front panel drilling size

Rear panel installation size

S90B SLIM DOUBLE WALL DRAWER (GLASS SIDE SERIES)
INSTALLTION INSTRUCTION

S90B DRAWER INSTALLATION

St4x16mm self-tapping screws

St4x16mm self-tapping screws

Two sides keep abreast

Front panel height adjustment ±2mm

Front panel width adjustment ±1.2mm

S90B DRAWER DISASSEMBLY

Drawer disassembly steps

DRAWER DISASSEMBLY

Drawer disassembly steps

GLASS INSTALLATION

Glass installation steps

GLASS DISASSEMBLY

Glass disassembly steps

S90BGM600
GLASS SLIM DOUBLE WALL INNER DRAWER
(MEDIUM INNER DRAWER)


• Height of side panels: 90mm



FRONT CONNECTORS L/R + FRONT PANEL	ITEM NO.
	S90BGM600G/W-600
	S90BGM600G/W-800
	S90BGM600G/W-900
	S90BGM600G/W-1000
	S90BGM600G/W-1200

Side panel colors: W for White, G for Grey

① Front connectors L/R	② Front panel (mm)	③ Glass Front panel (mm)



INNER DRAWER FRONT PANLE
INSTALLTION INSTRUCTION

S90B MEDIUM INNER DRAWER INSTALLATON				
S90B HIGH INNER DRAWER INSTALLATION				
S90B EXTRA-HIGH INNER DRAWER INSTALLATION				

S90BGH600
GLASS SLIM DOUBLE WALL INNER DRAWER
(HIGH INNER DRAWER)


• Height of side panels: 122mm



FRONT CONNECTORS L/R + FRONT PANEL + SQUARE RAILL	ITEM NO.
	S90BGH600G/W-600
	S90BGH600G/W-800
	S90BGH600G/W-900
	S90BGH600G/W-1000
	S90BGH600G/W-1200


Side panel colors: W for White, G for Grey

① Front connectors L/R	② Front panel (mm)	③ Glass Front panel (mm)



S90BGK600
GLASS SLIM DOUBLE WALL INNER DRAWER
(EXTRA-HIGH INNER DRAWER)


• Height of side panels: 172mm



FRONT CONNECTORS L/R + FRONT PANEL	ITEM NO.
	S90BGK600G/W-600
	S90BGK600G/W-800
	S90BGK600G/W-900
	S90BGK600G/W-1000
	S90BGK600G/W-1200

Side panel colors: W for White, G for Grey

① Front connectors L/R	② Front panel (mm)	③ Glass Front panel (mm)






S80AL600
DOUBLE WALL DRAWER
(LOW DRAWER)

- Load capacity: 35kg
 - Length: 270-550mm
 - Height of side panels: 81mm
- Front panel width adjustment: ±1mm
 - Front panel height adjustment: ±2mm




INSTALLATION PARAMETERS


LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth

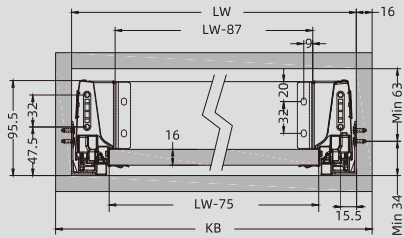


16mm panel

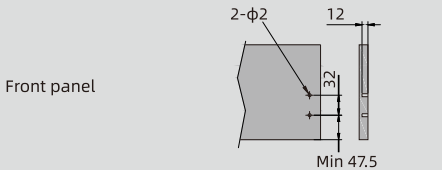


Front panel

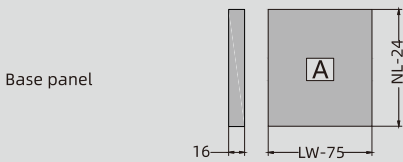

Base panel




Back panel

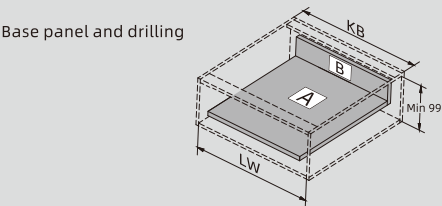


Base panel and drilling

Standard drawer

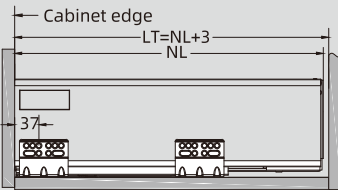

16mm panel


Hole position (mm)

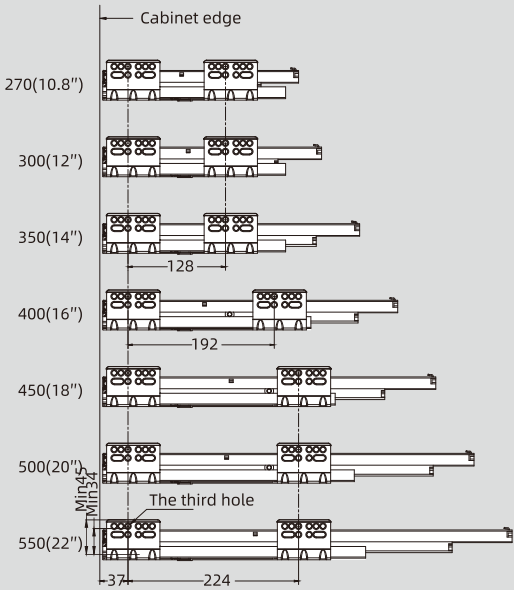

ITEM NO.	SIDE PANELS L/R DECORATIVE COVERS L/R	DRAWER SLIDES L/R	FRONT CONNECTORS L/R	BACK PANEL FASTENERS L/R
S80AL600W/S-270				
S80AL600W/S-300				
S80AL600W/S-350				
S80AL600W/S-400				
S80AL600W/S-450				
S80AL600W/S-500				
S80AL600W/S-550				

Side panel colors: W for White, S for Grey

Accessories






S80AM610
DOUBLE WALL DRAWER
(MEDIUM DRAWER WITH ROUND BARS)

- Load capacity: 35kg
 - Length: 270-550mm
 - Height of side panels: 81mm
- Front panel width adjustment: ±1mm
 - Front panel height adjustment: ±2mm




INSTALLATION PARAMETERS

LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth

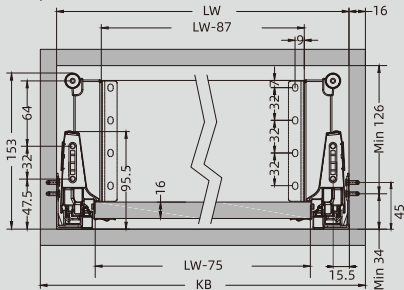


16mm panel


Front panel




Base panel




Back panel



Base panel and drilling




Standard drawer

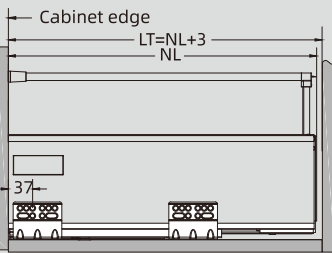

16mm panel


Hole position (mm)

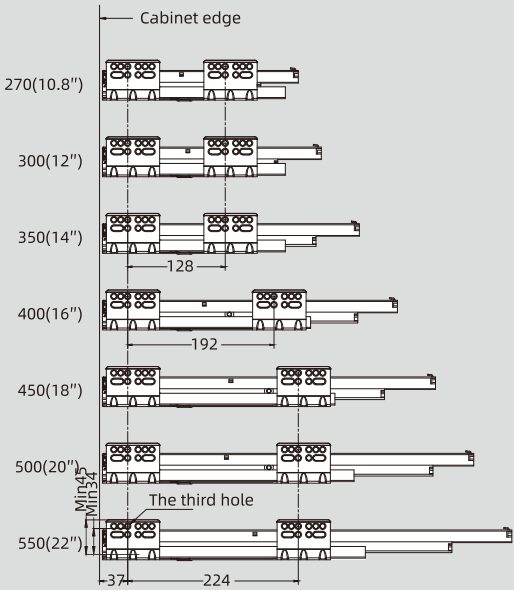

ITEM NO.	Side panels L/R + Decorative covers L/R + Round rails L/R	DRAWER SLIDES L/R	FRONT CONNECTORS L/R	BACK PANEL FASTENERS L/R
S80AM610W/S-270				
S80AM610W/S-300				
S80AM610W/S-350				
S80AM610W/S-400				
S80AM610W/S-450				
S80AM610W/S-500				
S80AM610W/S-550				

Side panel colors: W for White, S for Grey

Accessories









S80AK610
DOUBLE WALL DRAWER
(EXTRA-HIGH DRAWER WITH ROUND BARS)

- Load capacity: 35kg
- Length: 270-550mm
- Height of side panels: 81mm
- Front panel width adjustment: $\pm 1\text{mm}$
- Front panel height adjustment: $\pm 2\text{mm}$




INSTALLATION PARAMETERS

LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth

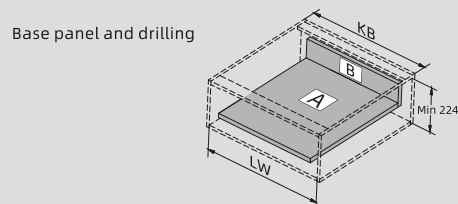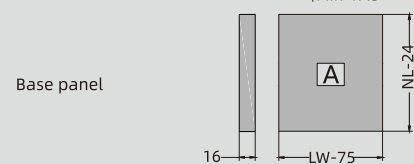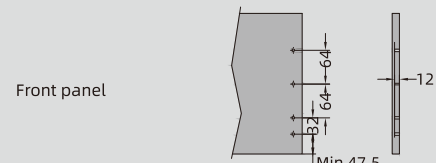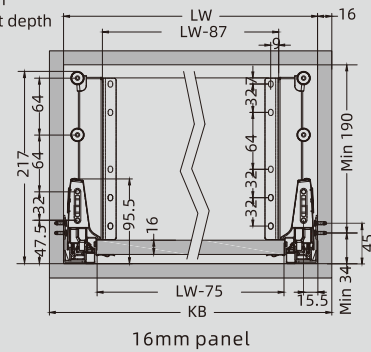


16mm panel

Hole position (mm)

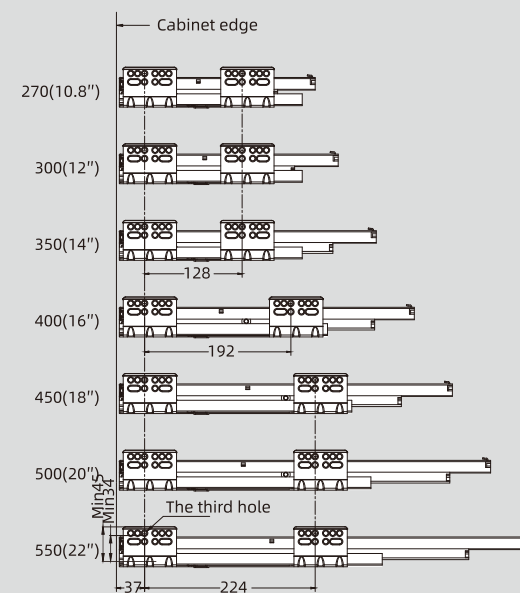

ITEM NO.	Side panels L/R + Decorative covers L/R + Round rails L/R	DRAWER SLIDES L/R	FRONT CONNECTORS L/R	BACK PANEL FASTENERS L/R
580AK610W/S-270				
580AK610W/S-300				
580AK610W/S-350				
580AK610W/S-400				
580AK610W/S-450				
580AK610W/S-500				
580AK610W/S-550				

Side panel colors: W for White, S for Grey


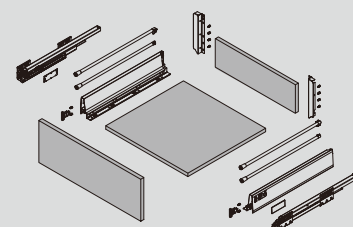


S80AM620
DOUBLE WALL DRAWER
(MEDIUM DRAWER WITH SQUARE BARS)


- Load capacity: 35kg
 - Length: 270-550mm
 - Height of side panels: 81mm
- Front panel width adjustment: ±1mm
 - Front panel height adjustment: ±2mm




INSTALLATION PARAMETERS

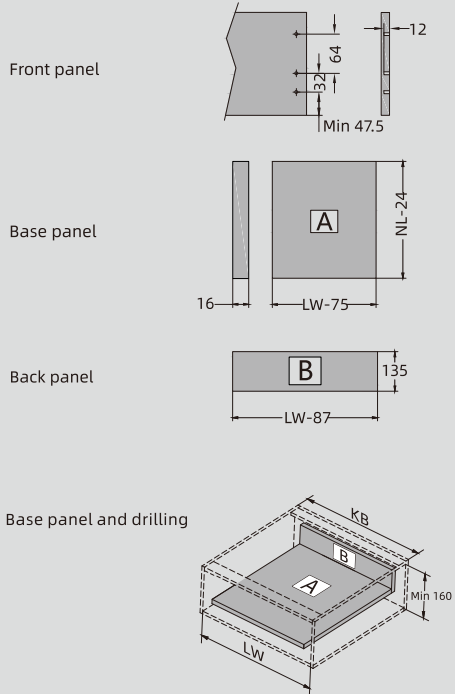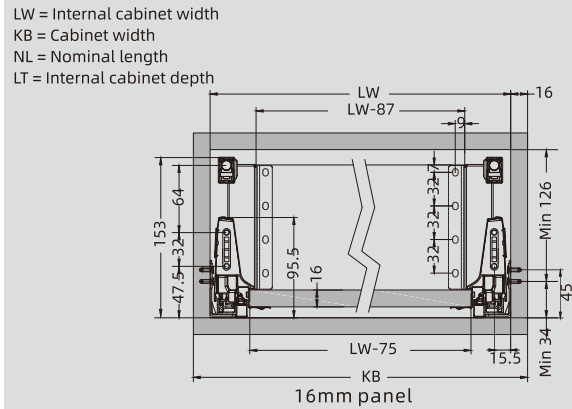

Standard drawer

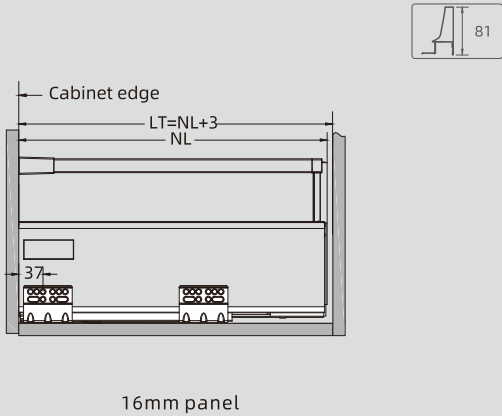


Hole position (mm)

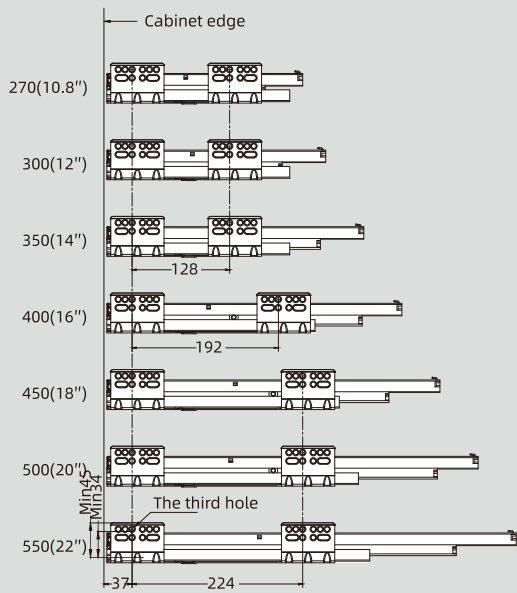

ITEM NO.	Side panels L/R + Decorative covers L/R + Square rails L/R	DRAWER SLIDES L/R	FRONT CONNECTORS L/R	BACK PANEL FASTENERS L/R
S80AM620W/S-270				
S80AM620W/S-300				
S80AM620W/S-350				
S80AM620W/S-400				
S80AM620W/S-450				
S80AM620W/S-500				
S80AM620W/S-550				

Side panel colors: W for White, S for Grey

Accessories





S80AK620
DOUBLE WALL DRAWER
(EXTRA-HIGH DRAWER WITH SQUARE BARS)


- Load capacity: 35kg
 - Length: 270-550mm
 - Height of side panels: 81mm
- Front panel width adjustment: ±1mm
 - Front panel height adjustment: ±2mm




INSTALLATION PARAMETERS

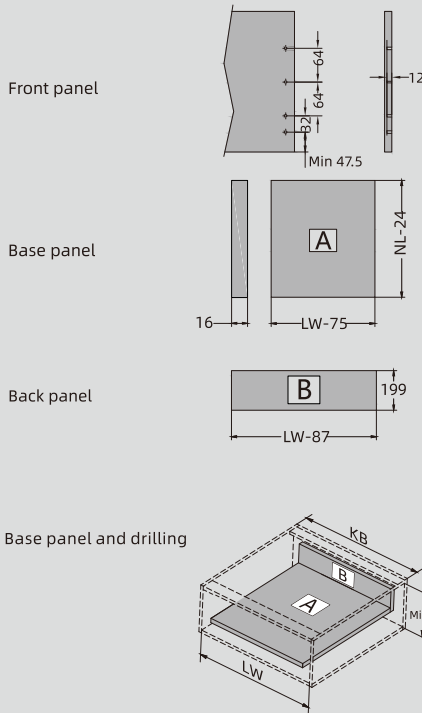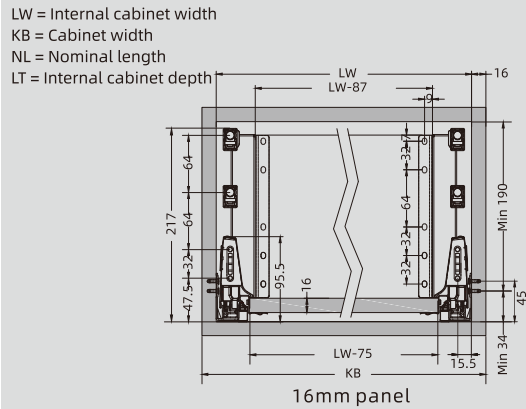

Standard drawer

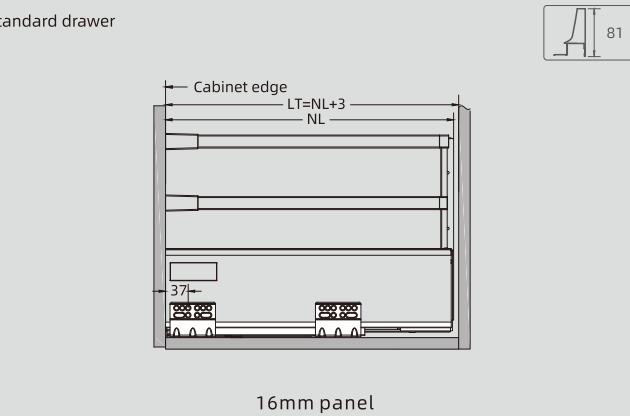


Hole position (mm)

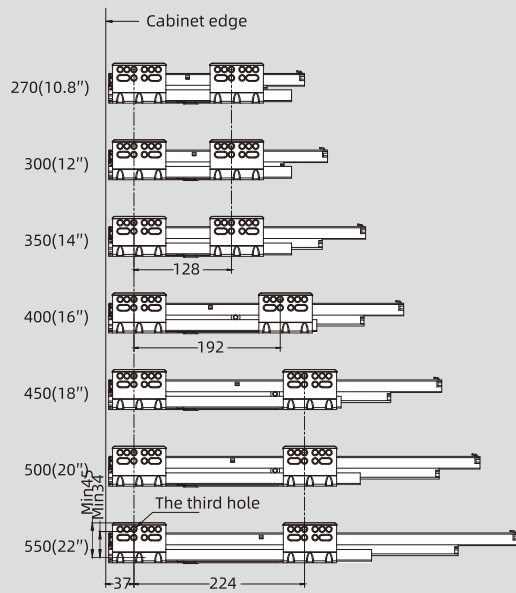

ITEM NO.	Side panels L/R + Decorative covers L/R + Square rails L/R	DRAWER SLIDES L/R	FRONT CONNECTORS L/R	BACK PANEL FASTENERS L/R
S80AK620W/S-270				
S80AK620W/S-300				
S80AK620W/S-350				
S80AK620W/S-400				
S80AK620W/S-450				
S80AK620W/S-500				
S80AK620W/S-550				

Side panel colors: W for White, S for Grey

Accessories






S80AK630
GLASS DOUBLE WALL DRAWER
(EXTRA-HIGH DRAWER)

- Load capacity: 35kg
 - Length: 270-550mm
 - Height of side panels: 81mm
- Front panel width adjustment: ±1mm
 - Front panel height adjustment: ±2mm




INSTALLATION PARAMETERS

LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth

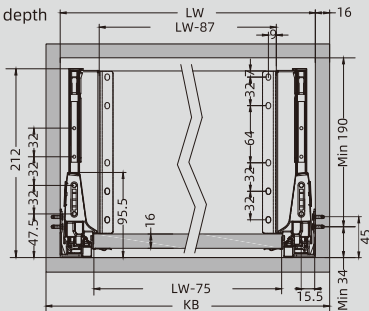


16mm panel


Front panel




Base panel




Back panel



Base panel and drilling




Standard drawer

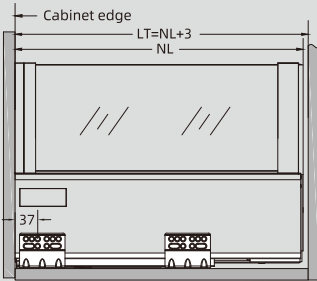

16mm panel


Hole position (mm)

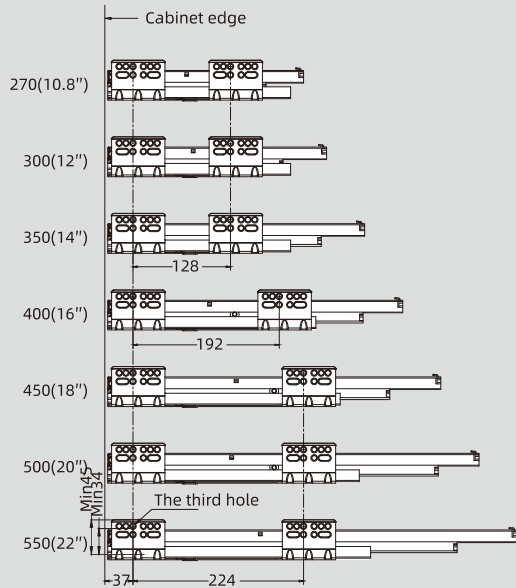

ITEM NO.	Side panels L/R + Decorative covers L/R + Glass sides L/R	DRAWER SLIDES L/R	FRONT CONNECTORS L/R	BACK PANEL FASTENERS L/R
S80AK630W/S-270				
S80AK630W/S-300				
S80AK630W/S-350				
S80AK630W/S-400				
S80AK630W/S-450				
S80AK630W/S-500				
S80AK630W/S-550				

Side panel colors: W for White, S for Grey

Accessories

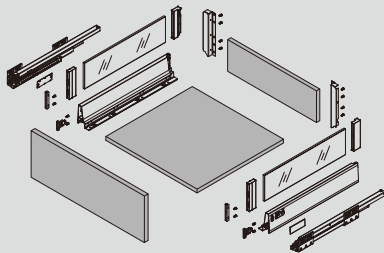

S80 DOUBLE WALL DRAWER (DOUBLE WALL)
INSTALLTION INSTRUCTION

S80A LOW DRAWER HEIGHT L = 84

Internal cabinet space
Inner drawer: 136.5

Front connectors installation size

Front panel drilling size

Back panel installation size

S80A MEDIUM DRAWER HEIGHT M = 135

Internal cabinet space

Front connectors installation size

Front panel drilling size

Back panel installation size

S80A HIGH DRAWER HEIGHT H = 199

Internal cabinet space

Front connectors installation size

Front panel drilling size

Back panel installation size

S80 DOUBLE WALL SIDE PANEL
INSTALLTION INSTRUCTION

LOW DRAWER INSTALLATON

St4x16mm self-tapping screws

St4x16mm self-tapping screws

St4x16mm self-tapping screws

St4x20mm self-tapping screws

Drawer width adjustment

Adjust both sides

Tighten the fixing screw after adjustment

MEDIUM STANDARD DRAWER INSTALLATION

St3x12mm self-tapping screws

HIGHER STANDARD DRAWER INSTALLATION

St3x12mm self-tapping screws

HIGHER INNER DRAWER WITH GLASS SIDE PANEL INSTALLATION

St3x12mm self-tapping screws

DRAWER DISASSEMBLE

S80NL600
DOUBLE WALL INNER DRAWER
(LOW INNER DRAWER)

• Height of side panels: 81mm



FRONT CONNECTORS L/R + FRONT PANEL	ITEM NO.
	S80NL600W/S-600
	S80NL600W/S-800
	S80NL600W/S-900
	S80NL600W/S-1000
	S80NL600W/S-1200

Side panel colors: W for White, S for Grey



① Front connectors L/R	② Front panel (mm)

S80NK630
DOUBLE WALL INNER DRAWER
(EXTRA-HIGH DRAWER)

• Height of side panels: 81mm



FRONT CONNECTORS L/R + FRONT PANEL + SQUARE RAILL	ITEM NO.
	S80NK630W/S-600
	S80NK630W/S-800
	S80NK630W/S-900
	S80NK630W/S-1000
	S80NK630W/S-1200

Side panel colors: W for White, S for Grey



① Front connectors L/R	② Front panel (mm)	③ Square rail (mm)

S80NM610
DOUBLE WALL INNER DRAWER
(MEDIUM INNER DRAWER WITH SQUARE BARS)

• Height of side panels: 81mm



FRONT CONNECTORS L/R + FRONT PANEL	ITEM NO.
	S80NM610W/S-600
	S80NM610W/S-800
	S80NM610W/S-900
	S80NM610W/S-1000
	S80NM610W/S-1200

Side panel colors: W for White, S for Grey




① Front connectors L/R	② Front panel (mm)

S80 INNER DRAWER FRONT PANLE
IINSTALLTION INSTRUCTION

S80N LOW INNER DRAWER INSTALLATION				
S80N MEDIUM INNER DRAWER INSTALLATION				
S80N HIGHER INNER DRAWER WITH GLASS SIDE PANEL INSTALLATION				

S80NK610
DOUBLE WALL INNER DRAWER
(EXTRA-HIGH DRAWER)

• Height of side panels: 81mm



FRONT CONNECTORS L/R + FRONT PANEL + SQUARE RAILL	ITEM NO.
	S80NK610W/S-600
	S80NK610W/S-800
	S80NK610W/S-900
	S80NK610W/S-1000
	S80NK610W/S-1200

Side panel colors: W for White, S for Grey



① Front connectors L/R	② Front panel (mm)	③ Square rail (mm)




S51EL600
ULTRA SLIM DRAWER (LOW DRAWER)
SOFT-CLOSING VERSION

- Load capacity: 35kg
 - Length: 250-550mm
 - Height of side panels: 89mm
- Drawer height adjustment: 0~+3mm
 - Drawer depth adjustment: 0~+5mm
 - Drawer width adjustment: ±1.5mm




INSTALLATION PARAMETERS

LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth

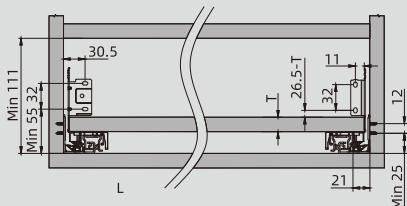


16mm panel

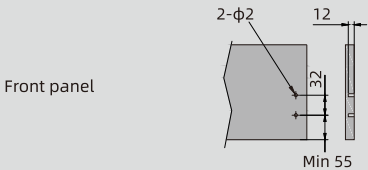


Front panel

Base panel




Back panel




Aluminum back panel width L= LW(Cabinet Net Width)-14mm

Base panel and drilling




Standard drawer

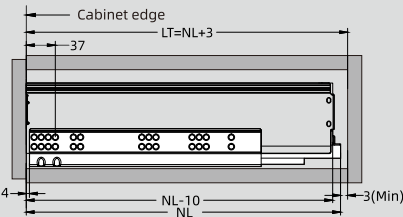


16mm panel


Hole position (mm)

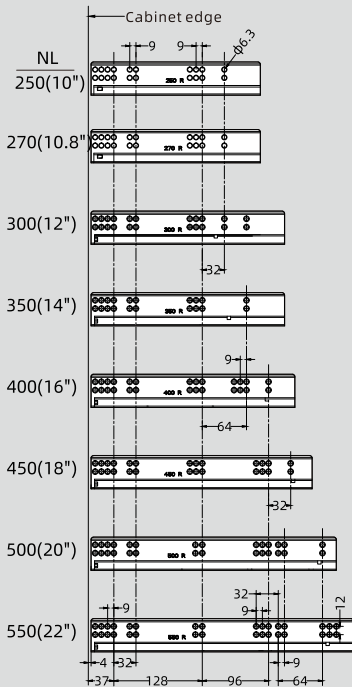


ORDER NUMBER INFORMATION

ITEM NO.	SPECIFICATION	DRAWER SLIDES L/R	SIDE PANELS L/R DECORATIVE COVERS L/R	ALUMINUM BACK PANEL			
S51EL600D/M-250	250mm(10")		S32H600-250		S51CL600D/M-250CB		S51LBP1D/M00-600
S51EL600D/M-270	270mm(10.8")		S32H600-270		S51CL600D/M-270CB		S51LBP1D/M00-700
S51EL600D/M-300	300mm(12")		S32H600-300		S51CL600D/M-300CB		S51LBP1D/M00-800
S51EL600D/M-350	350mm(14")		S32H600-350		S51CL600D/M-350CB		S51LBP1D/M00-900
S51EL600D/M-400	400mm(16")		S32H600-400		S51CL600D/M-400CB		S51LBP1D/M00-3000
S51EL600D/M-450	450mm(18")		S32H600-450		S51CL600D/M-450CB		
S51EL600D/M-500	500mm(20")		S32H600-500		S51AL600D/M-500CB		
S51EL600D/M-550	550mm(22")		S32H600-550		S51AL600D/M-550CB		
Optional S32H600 soft close undermounted slides with pins/locks							

Side panel colors: D for grey, M for white

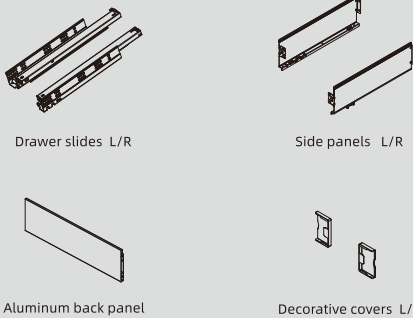

Accessories

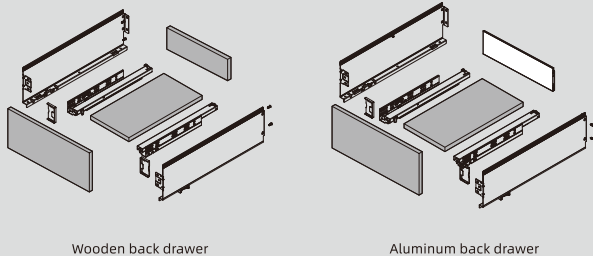

S51EM600
ULTRA SLIM DRAWER (MEDIUM DRAWER)
SOFT-CLOSING VERSION

- Load capacity: 35kg

• Length: 250-550mm

• Height of side panels: 127mm
- Drawer height adjustment: 0~+3mm


• Drawer depth adjustment: 0~+5mm

• Drawer width adjustment: ±1.5mm




INSTALLATION PARAMETERS

LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth

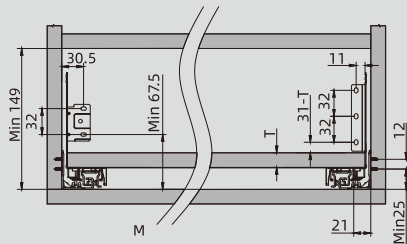


16mm panel

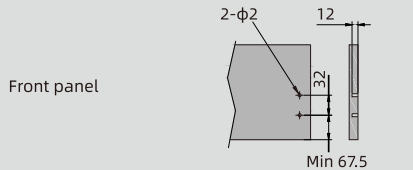

Front panel




Base panel




Back panel

Aluminum back panel width L= LW(Cabinet Net Width)-14mm

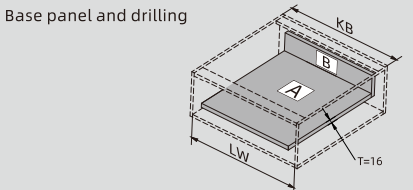


Base panel and drilling

Standard drawer

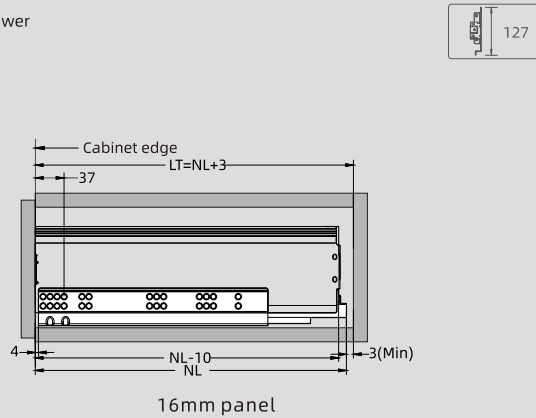


16mm panel

Hole position (mm)

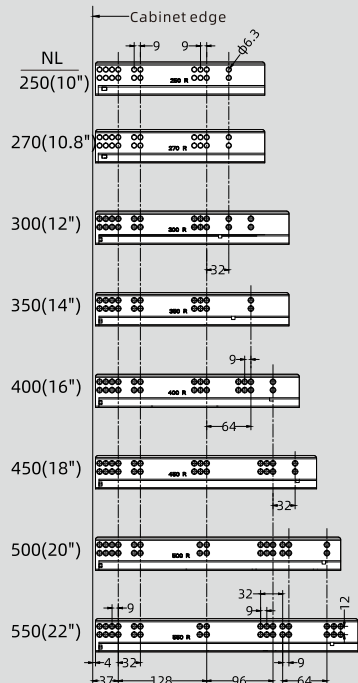

ORDER NUMBER INFORMATION

ITEM NO.	SPECIFICATION	DRAWER SLIDES L/R	SIDE PANELS L/R DECORATIVE COVERS L/R	ALUMINUM BACK PANEL	
S51EM600D/M-250	250mm(10")		S32H600-250	S51CM600D/M-250CB	S51LBP1D/M00-600
S51EM600D/M-270	270mm(10.8")		S32H600-270	S51CM600D/M-270CB	
S51EM600D/M-300	300mm(12")		S32H600-300	S51CM600D/M-300CB	S51LBP1D/M00-700
S51EM600D/M-350	350mm(14")		S32H600-350	S51CM600D/M-350CB	
S51EM600D/M-400	400mm(16")		S32H600-400	S51CM600D/M-400CB	S51LBP1D/M00-800
S51EM600D/M-450	450mm(18")		S32H600-450	S51CM600D/M-450CB	
S51EM600D/M-500	500mm(20")		S32H600-500	S51AM600D/M-500CB	S51LBP1D/M00-900
S51EM600D/M-550	550mm(22")		S32H600-550	S51AM600D/M-550CB	S51LBP1D/M00-3000
Optional S32H600 soft close undermounted slides with pins/locks					

Side panel colors: D for grey, M for white

S51EH600
ULTRA SLIM DRAWER (HIGH DRAWER)
SOFT-CLOSING VERSION

- Load capacity: 35kg

• Length: 250-550mm

• Height of side panels: 157mm
- Drawer height adjustment: 0~+3mm


• Drawer depth adjustment: 0~+5mm

• Drawer width adjustment: ±1.5mm




INSTALLATION PARAMETERS


LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth

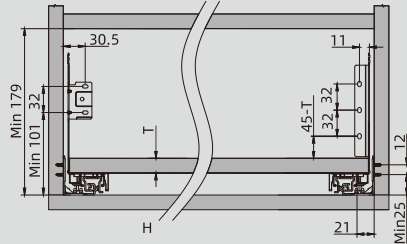


16mm panel

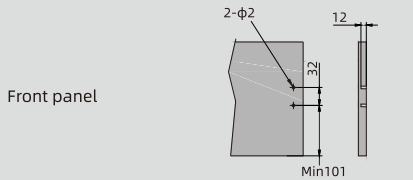

Front panel




Base panel




Back panel

Aluminum back panel width L= LW(Cabinet Net Width)-14mm

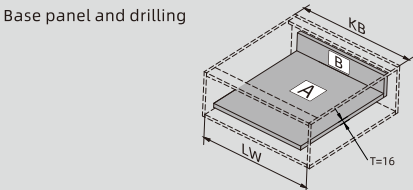


Base panel and drilling

Standard drawer

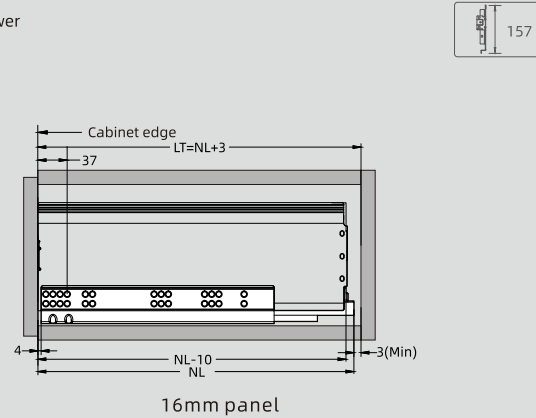


16mm panel

Hole position (mm)

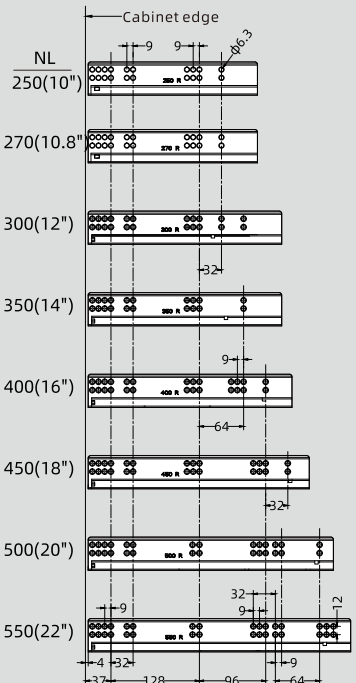

ORDER NUMBER INFORMATION

ITEM NO.	SPECIFICATION	DRAWER SLIDES L/R	SIDE PANELS L/R DECORATIVE COVERS L/R	ALUMINUM BACK PANEL			
S51EH600D/M-250	250mm(10")		S32H600-250		S51LBP1D/M00-600		
S51EH600D/M-270	270mm(10.8")		S32H600-270		S51CH600D/M-250CB	S51CH600D/M-270CB	S51LBP1D/M00-700
S51EH600D/M-300	300mm(12")		S32H600-300		S51CH600D/M-300CB	S51CH600D/M-300CB	S51LBP1D/M00-800
S51EH600D/M-350	350mm(14")		S32H600-350		S51CH600D/M-350CB	S51CH600D/M-350CB	S51LBP1D/M00-900
S51EH600D/M-400	400mm(16")		S32H600-400		S51CH600D/M-400CB	S51CH600D/M-400CB	S51LBP1D/M00-1000
S51EH600D/M-450	450mm(18")		S32H600-450		S51CH600D/M-450CB	S51CH600D/M-450CB	S51LBP1D/M00-1100
S51EH600D/M-500	500mm(20")		S32H600-500		S51AH600D/M-500CB	S51AH600D/M-500CB	S51LBP1D/M00-1200
S51EH600D/M-550	550mm(22")		S32H600-550		S51AH600D/M-550CB	S51AH600D/M-550CB	S51LBP1D/M00-1300
Optional S32H600 soft close undermounted slides with pins/locks							

Side panel colors: D for grey, M for white


S51EK600
ULTRA SLIM DRAWER (EXTRA-HIGH DRAWER)
SOFT-CLOSING VERSION

- Load capacity: 35kg
 - Length: 250-550mm
 - Height of side panels: 194mm
- Drawer height adjustment: 0~+3mm
 - Drawer depth adjustment: 0~+5mm
 - Drawer width adjustment: ±1.5mm




INSTALLATION PARAMETERS


LW = Internal cabinet width
KB = Cabinet width
NL = Nominal length
LT = Internal cabinet depth

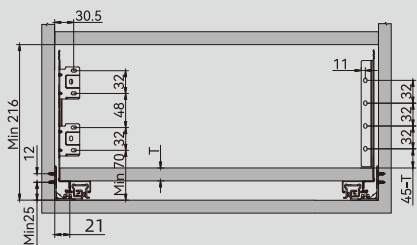


16mm panel

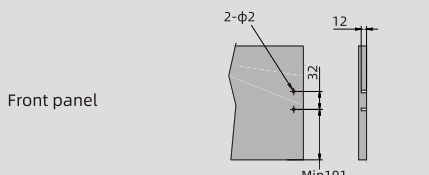

Front panel




Base panel




Back panel

Aluminum back panel width L= LW(Cabinet Net Width)-14mm

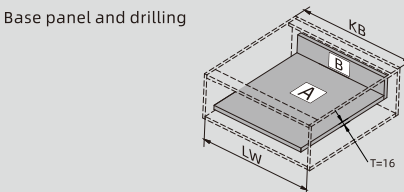


Base panel and drilling

Standard drawer

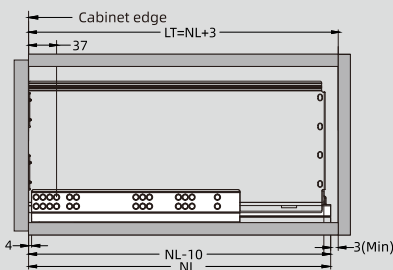


16mm panel

Hole position (mm)

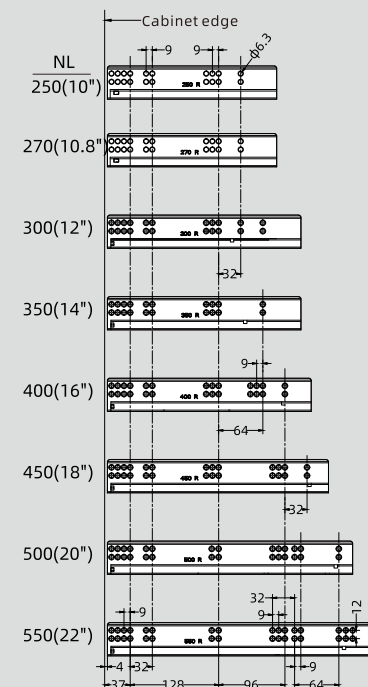

ORDER NUMBER INFORMATION

ITEM NO.	SPECIFICATION	DRAWER SLIDES L/R		SIDE PANELS L/R DECORATIVE COVERS L/R		ALUMINUM BACK PANEL	
S51EK600D/M-250	250mm(10")		S32H600-250		S51CH600D/M-250CB		S51LBP1D/M00-600
S51EK600D/M-270	270mm(10.8")		S32H600-270		S51CH600D/M-270CB		S51LBP1D/M00-700
S51EK600D/M-300	300mm(12")		S32H600-300		S51CH600D/M-300CB		S51LBP1D/M00-800
S51EK600D/M-350	350mm(14")		S32H600-350		S51CH600D/M-350CB		S51LBP1D/M00-900
S51EK600D/M-400	400mm(16")		S32H600-400		S51CH600D/M-400CB		S51LBP1D/M00-3000
S51EK600D/M-450	450mm(18")		S32H600-450		S51CH600D/M-450CB		
S51EK600D/M-500	500mm(20")		S32H600-500		S51AH600D/M-500CB		
S51EK600D/M-550	550mm(22")		S32H600-550		S51AH600D/M-550CB		
Optional S32H600 soft close undermounted slides with pins/locks							

Side panel colors: D for grey, M for white

S51E ULTRA SLIM DRAWER (ULTRA SLIM DRAWER)
INSTALLTION INSTRUCTION

S51E LOW DRAWER HEIGHT = 89

Internal cabinet space

Front connectors installation size

Front panel drilling size

Rear panel installation size

S51E MEDIUM DRAWER HEIGHT = 127

Internal cabinet space

Front connectors installation size

Front panel drilling size

Rear panel installation size

S51E HIGH DRAWER HEIGHT = 157

Internal cabinet space

Front connectors installation size

Front panel drilling size

Rear panel installation size

S51E EXTRA-HIGH DRAWER HEIGHT = 194

Internal cabinet space

Front connectors installation size

Front panel drilling size

Rear panel installation size

S51E ULTRA SLIM DRAWER SIDE PANEL
INSTALLTION INSTRUCTION

DRAWER ASSEMBLY

DRAWER INSTALLATION

Drawer Adjustment


Slide Length	250	300	350	400	450	500	550
A	112	130	180	198	216	234	252
B	96	128	128	216	192	224	256

Aluminum back panel width
16mm pannel aluminum back panel width L= LW(Cabinet Net Width)-14mm
18mm pannel aluminum back panel width L= LW(Cabinet Net Width)-21mm


Base Panel Pre-drilling Size

Slide Length	250	300	350	400	450	500	550
A	112	130	180	198	216	234	252
B	96	128	128	216	192	224	256

Apply to TUTTI slide : 523H805/523F805/532H800/532F801/532F804/539P801



DRAWER SLIDE

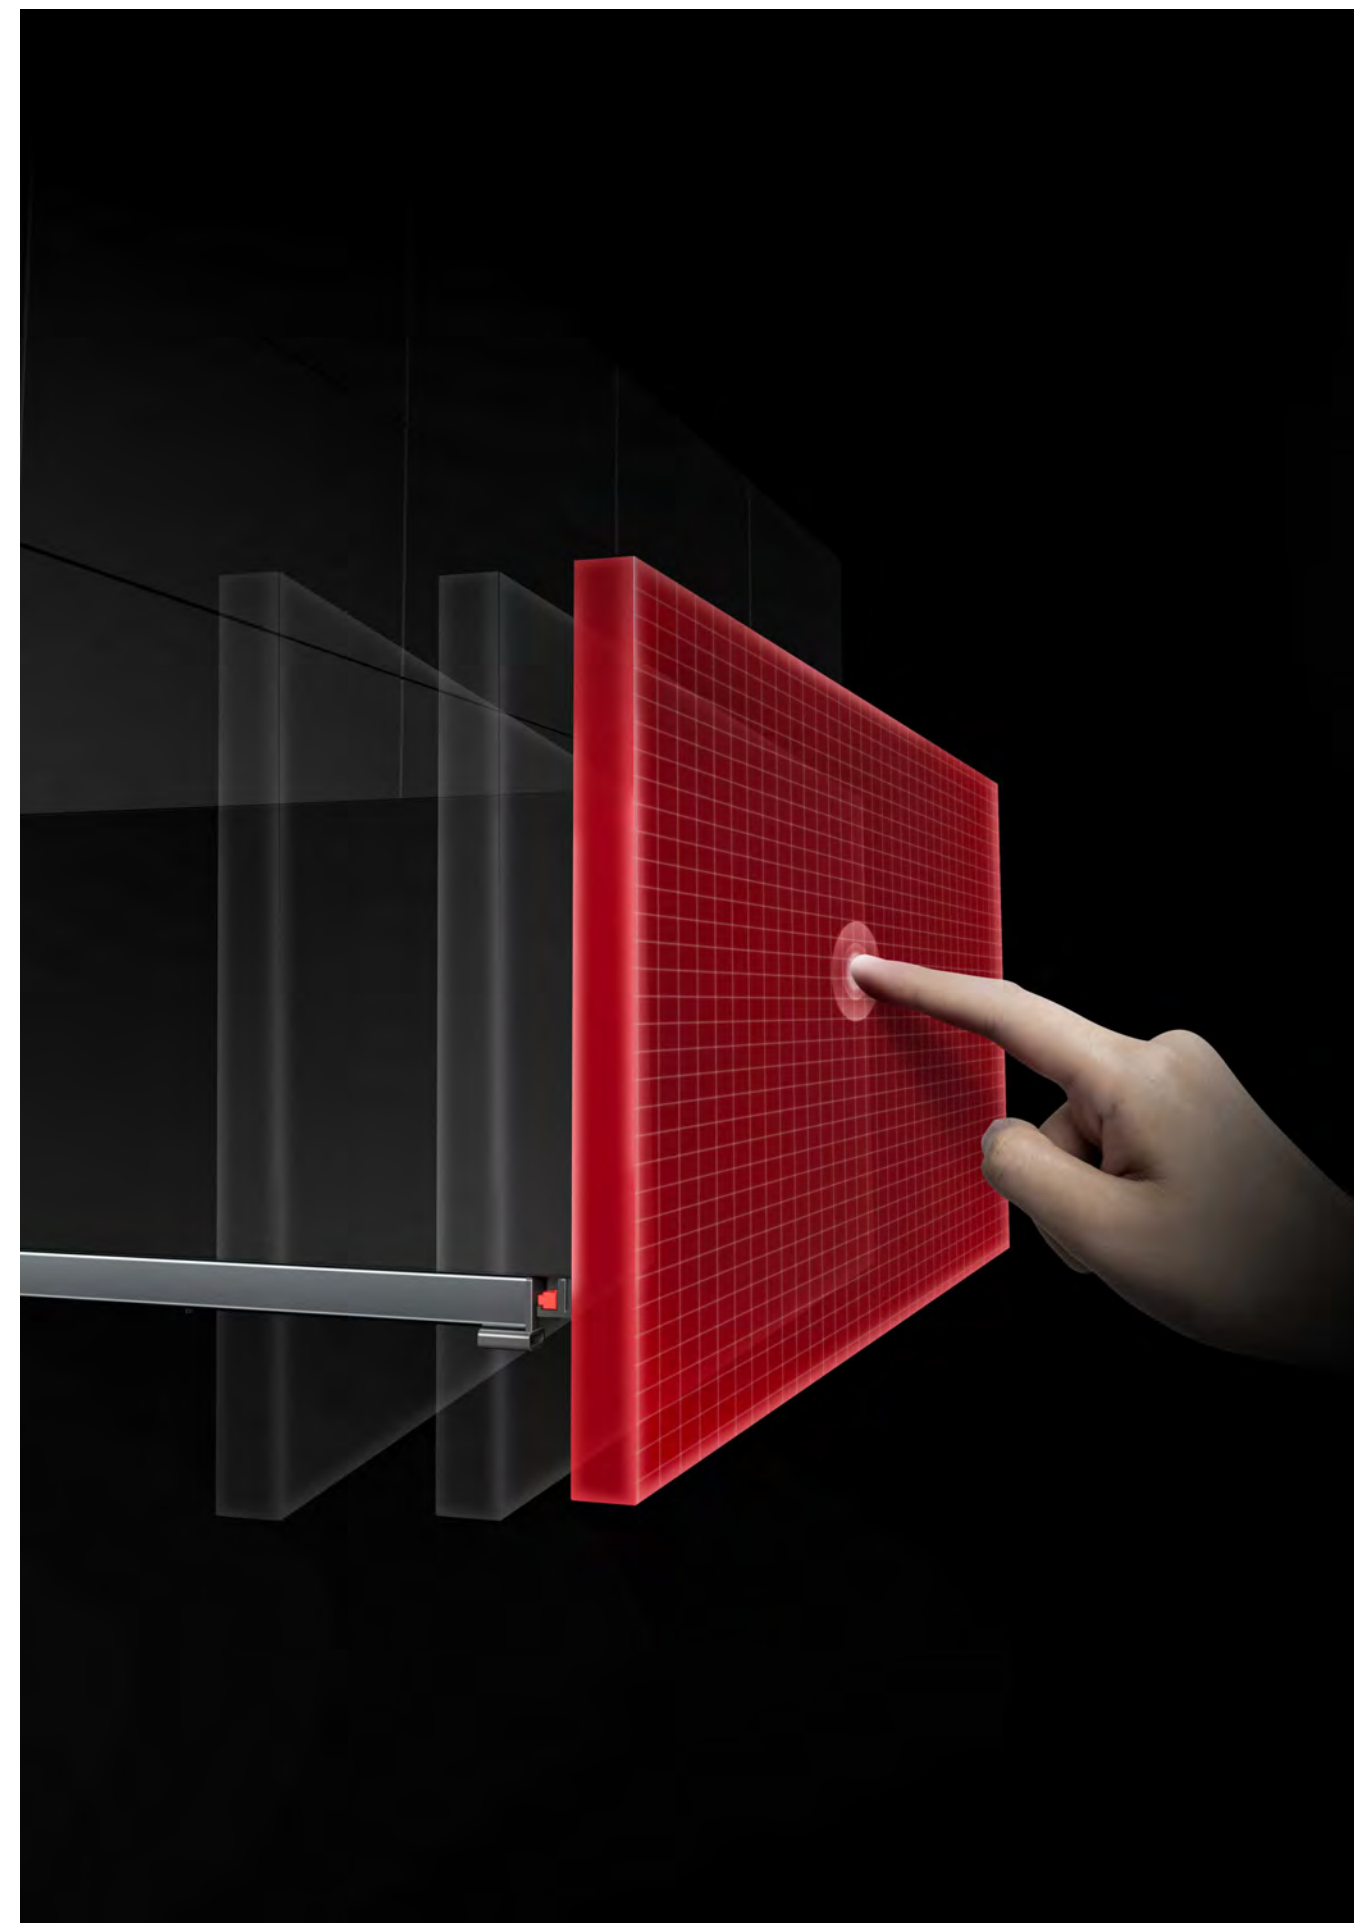



→ **S39** Push-to-open & Soft-closing



- 50% reduction in opening effort 
- 2.5 mm minimum front gap 
- Synchronization bar for wide activation range 
- Automatic reset for soft-closing 
- Quiet & smooth operation 




S32H(600/800)
FULL EXTENSION SYNCHRONIZED
SOFT-CLOSING UNDERMOUNTED SLIDE

- Load capacity: 35kg
 - Length: 250-600mm
- Drawer width adjustment: ±1.5mm
 - Drawer height adjustment: 0~+3mm
 - Drawer depth adjustment: 0~+5mm




INSTALLATION PARAMETERS


SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling
Max drawerside thickness:16mm




SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling
Max drawerside thickness:19mm



Standard drawer




Internal drawer

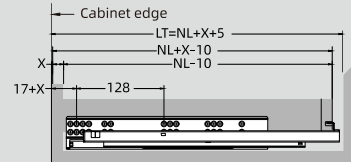


16/18mm panel

Drawer size and drilling(mm)

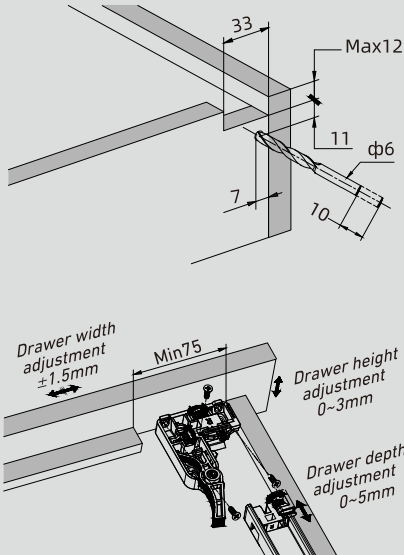

Hole position (mm)

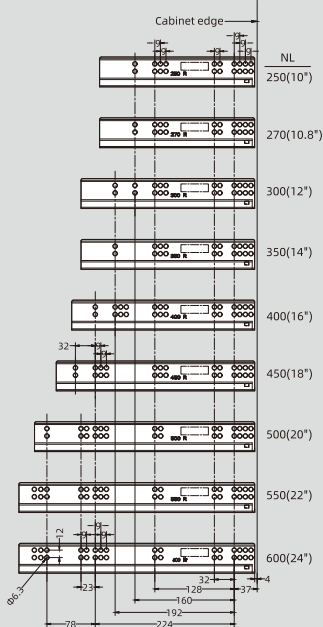

ORDER NUMBER INFORMATION

ITEM NO.(FOR 16mm)	ITEM NO.(FOR 18mm)	SPECIFICATION
S32H600-250	S32H800-250	250mm(10'')
S32H600-270	S32H800-270	270mm(10.7'')
S32H600-300	S32H800-300	300mm(12'')
S32H600-350	S32H800-350	350mm(14'')
S32H600-400	S32H800-400	400mm(16'')
S32H600-450	S32H800-450	450mm(18'')
S32H600-500	S32H800-500	500mm(20'')
S32H600-550	S32H800-550	550mm(22'')
S32H600-600	S32H800-600	600mm(24'')


S32F(601/801)
FULL EXTENSION SYNCHRONIZED
PUSH TO OPEN UNDERMOUNTED SLIDE

- Load capacity: 35kg
 - Length: 250-550mm
- Drawer width adjustment: ±1.5mm
 - Drawer height adjustment: 0~+3mm
 - Front panel gap adjustment: ±2mm




INSTALLATION PARAMETERS


SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling
Max drawerside thickness:16mm

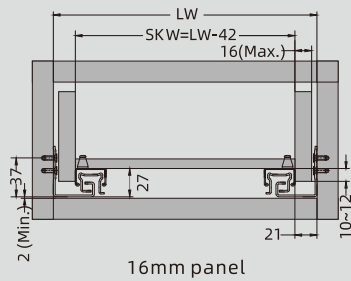


SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling
Max drawerside thickness:19mm

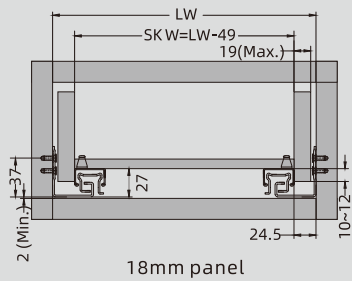





Standard drawer

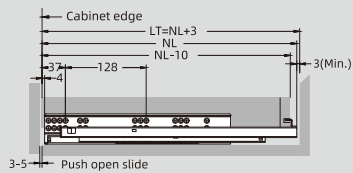


Internal drawer

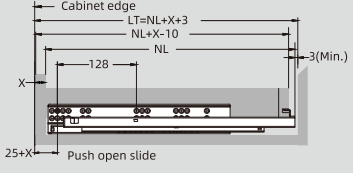

Drawer size and drilling(mm)



Hole position (mm)

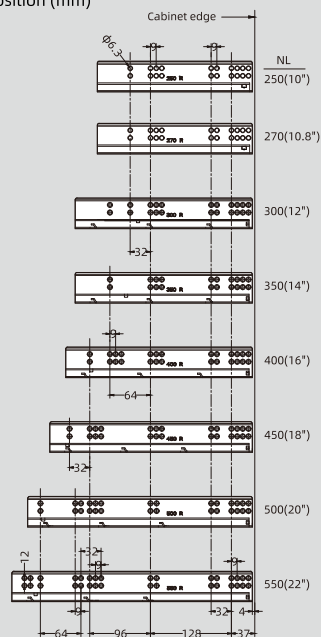

ORDER NUMBER INFORMATION

ITEM NO.(FOR 16mm)	ITEM NO.(FOR 18mm)	SPECIFICATION
S32F601-250	S32F801-250	250mm(10'')
S32F601-270	S32F801-270	270mm(10.7'')
S32F601-300	S32F801-300	300mm(12'')
S32F601-350	S32F801-350	350mm(14'')
S32F601-400	S32F801-400	400mm(16'')
S32F601-450	S32F801-450	450mm(18'')
S32F601-500	S32F801-500	500mm(20'')
S32F601-550	S32F801-550	550mm(22'')

ORDER NUMBER INFORMATION

ITEM NO.(FOR 16mm)	ITEM NO.(FOR 18mm)	SPECIFICATION
S32F604-250	S32F804-250	250mm(10'')
S32F604-270	S32F804-270	270mm(10.7'')
S32F604-300	S32F804-300	300mm(12'')
S32F604-350	S32F804-350	350mm(14'')
S32F604-400	S32F804-400	400mm(16'')
S32F604-450	S32F804-450	450mm(18'')
S32F604-500	S32F804-500	500mm(20'')
S32F604-550	S32F804-550	550mm(22'')




S32F(604/804)
FULL EXTENSION SYNCHRONIZED
PUSH TO OPEN UNDERMOUNTED SLIDE

- Load capacity: 35kg
- Length: 250-550mm
- Drawer width adjustment: $\pm 1.5\text{mm}$
- Drawer height adjustment: $0 \sim +3\text{mm}$
- Front panel gap adjustment: $\pm 2\text{mm}$




INSTALLATION PARAMETERS


SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling
Max drawerside thickness:16mm

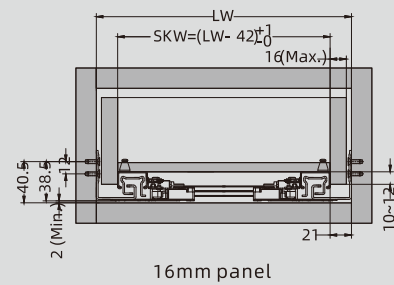


SKW = Internal drawer width
 LW = Internal cabinet width
 NL = Nominal length
 LT = Internal cabinet depth
 Drawer size and drilling
 Max drawerside thickness:19mm

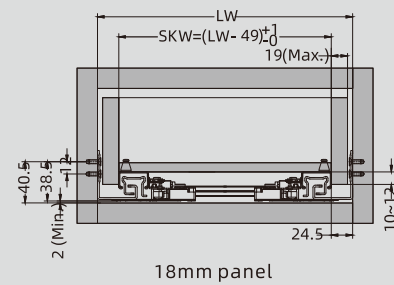

Standard drawer





Internal drawer




16/18mm panel


Drawer size and drilling(mm)




Front panel gap adjustment($\pm 2\text{mm}$)



Suggested touching range

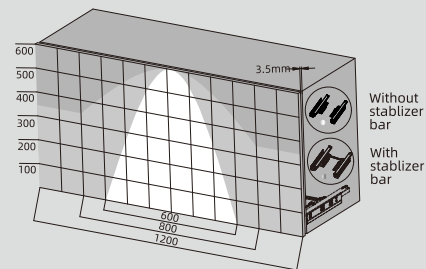

Hole position (mm)

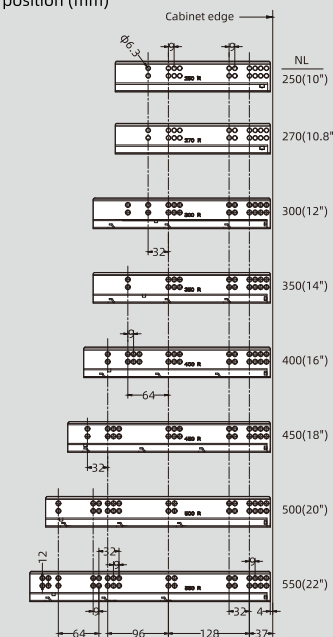


Installation steps for synchronizing bar:

Cutting size of 16mm
version stablizer bar=(LW-157)±1mm



Cutting size of 18mm
version stablizer bar=(LW-164)±1mm





- Load capacity: 35kg
- Length: 250-550mm
- Drawer height adjustment: 0~+3mm


INSTALLATION PARAMETERS

SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling
Max drawerside thickness: 16mm


SKW = Internal drawer width
 LW = Internal cabinet width
 NL = Nominal length
 LT = Internal cabinet depth
 Drawer size and drilling
 Max drawerside thickness: 19mm

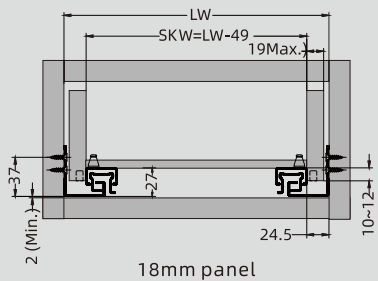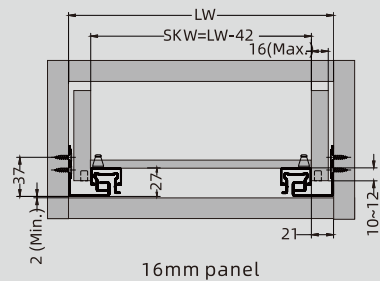

Standard drawer





Internal drawer




16/18mm panel

Drawer size and drilling (mm)

NL(mm)	250	270	300	350	400	450	500	550
A(mm)	190	205	245	270	305	330	355	390
B(mm)	215	235	265	315	365	415	465	515

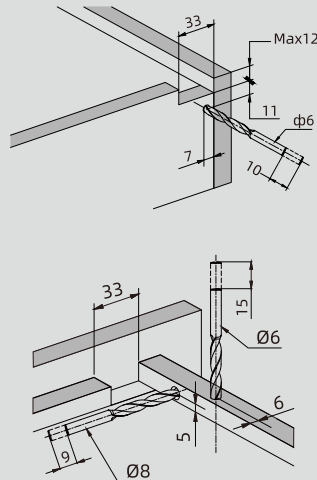

Hole position (mm)

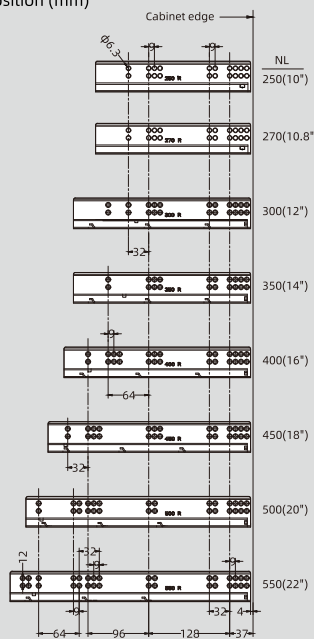

ORDER NUMBER INFORMATION



ITEM NO.(FOR 16mM)	ITEM NO.(FOR 18mm)	SPECIFICATION
S33H600-250	S33H800-250	250mm(10")
S33H600-270	S33H800-270	270mm(10.7")
S33H600-300	S33H800-300	300mm(12")
S33H600-350	S33H800-350	350mm(14")
S33H600-400	S33H800-400	400mm(16")
S33H600-450	S33H800-450	450mm(18")
S33H600-500	S33H800-500	500mm(20")
S33H600-550	S33H800-550	550mm(22")

- Load capacity: 35kg
- Length: 250-550mm
- Drawer height adjustment: 0~+3mm
- Front panel gap adjustment: ± 2 mm


INSTALLATION PARAMETERS

SKW = Internal drawer width
 LW = Internal cabinet width
 NL = Nominal length
 LT = Internal cabinet depth
 Drawer size and drilling
 Max drawerside thickness: 16mm


SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling
Max drawerside thickness: 19mm

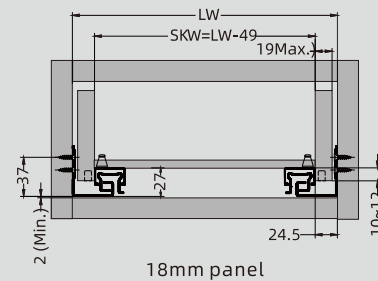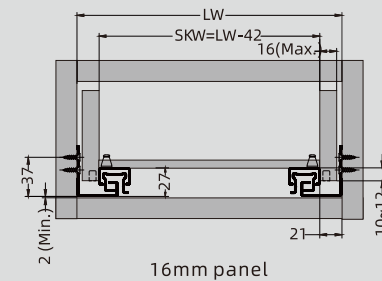

Standard drawer








Internal drawer




16/18mm panel

Drawer size and drilling (mm)

NL(mm)	250	270	300	350	400	450	500	550
A(mm)	190	205	245	270	305	330	355	390
B(mm)	215	235	265	315	365	415	465	515



Hole position (mm)

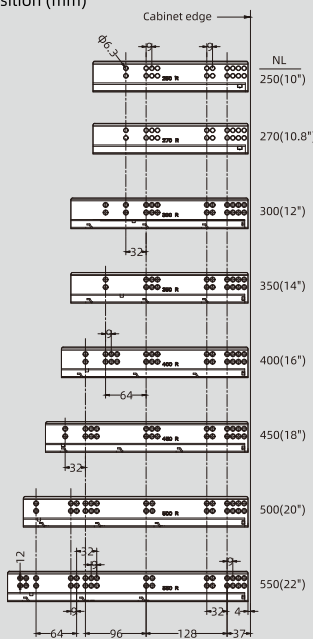


ORDER NUMBER INFORMATION

ITEM NO.(FOR 16mm)	ITEM NO.(FOR 18mm)	SPECIFICATION
S33F601-250	S33F801-250	250mm(10")
S33F601-270	S33F801-270	270mm(10.7")
S33F601-300	S33F801-300	300mm(12")
S33F601-350	S33F801-350	350mm(14")
S33F601-400	S33F801-400	400mm(16")
S33F601-450	S33F801-450	450mm(18")
S33F601-500	S33F801-500	500mm(20")
S33F601-550	S33F801-550	550mm(22")




S39P(602/802)
FULL EXTENSION SYNCHRONIZED PUSH
OPEN & SOFT-CLOSING UNDERMOUNT SLIDE

- Load capacity: 35kg
- Length: 300-600mm
- Drawer height adjustment: 0~+3mm
- Drawer width adjustment: ±1.5mm
- Front panel gap adjustment: +4~-2mm

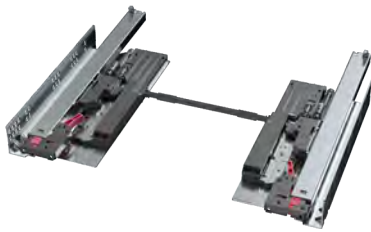


INSTALLATION PARAMETERS

SKW = Internal drawer width
LW = Internal cabinet width
 $LW \geq 290\text{mm}$ (Without stabilizer bar)
 $414 \leq LW \leq 1200\text{mm}$ (With stabilizer bar)
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling
Max drawerside thickness:16mm

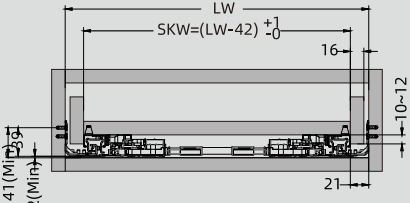


16mm panel

SKW = Internal drawer width
LW = Internal cabinet width
 $LW \geq 290\text{mm}$ (Without stabilizer bar)
 $414 \leq LW \leq 1200\text{mm}$ (With stabilizer bar)
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling
Max drawerside thickness:19mm

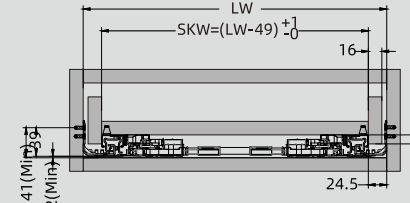


18mm panel

Standard drawer





Internal drawer

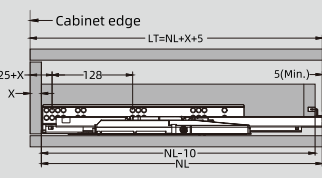


16/18mm panel


Drawer size and drilling (mm)




Front panel gap adjustment(+4~-2mm)



Suggested touching range

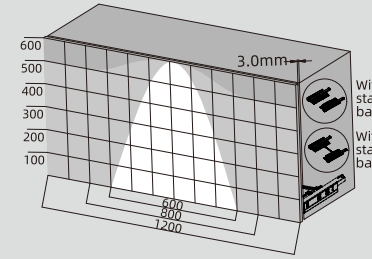

Hole position (mm)

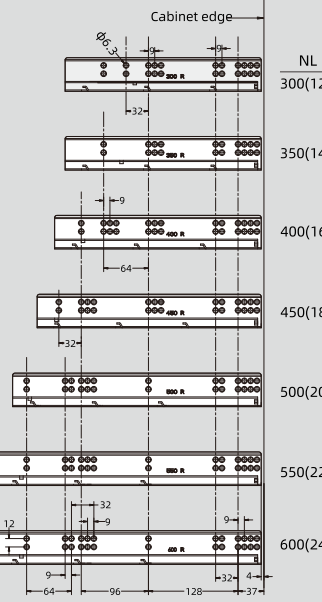

ORDER NUMBER INFORMATION


ITEM NO.(FOR 16mm)	ITEM NO.(FOR 18mm)	SPECIFICATION
S39P602-300	S39P802-300	300mm(12")
S39P602-350	S39P802-350	350mm(14")
S39P602-400	S39P802-400	400mm(16")
S39P602-450	S39P802-450	450mm(18")
S39P602-500	S39P802-500	500mm(20")
S39P602-550	S39P802-550	550mm(22")
S39P602-600	S39P802-600	600mm(24")

Installation steps for synchronizing bar:

16mm version synchronizing bar
cutting size=(LW-358±1mm)



18mm version synchronizing bar
cutting size=(LW-365±1mm)

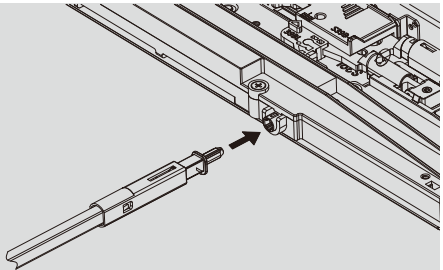




S42H(600/800)
FULL EXTENSION SOFT-CLOSING
FACE FRAME SLIDE

- Load capacity: 35kg
 - Length: 305-610mm
- Drawer height adjustment: 0~+3mm
 - Drawer depth adjustment: 0~+5mm(15~24")
 - Drawer width adjustment: ±1.5mm





INSTALLATION PARAMETERS

SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling
Max drawerside thickness:16mm

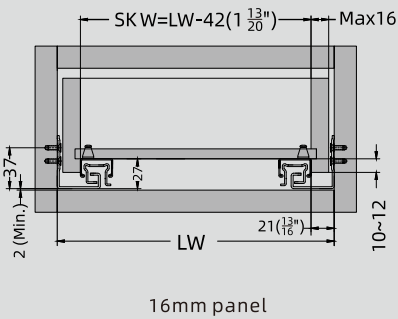


SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling
Max drawerside thickness:19mm

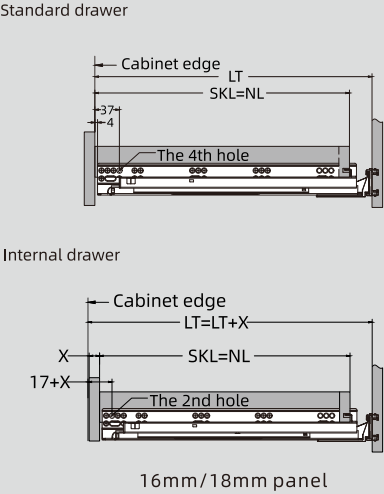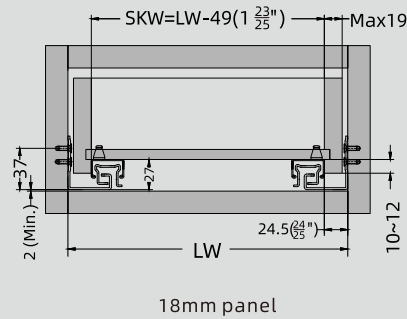


Drawer size and drilling (mm)

Drawer length (SKL)	Internal cabinet depth(LT)				None bracket
	A(Metal bracket)	B(Plastic bracket)	A(Metal bracket)	B(Plastic bracket)	
305(12")	326	369	337	369	NL+20
381(15")	402	445	413	445	
457(18")	478	521	489	521	
533(21")	554	597	565	597	
610(24")	631	674	642	674	

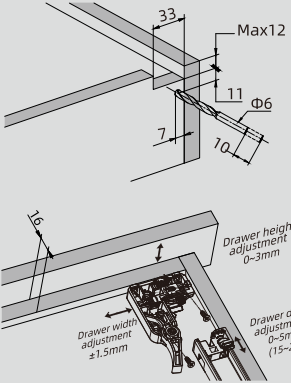

Hole position (mm)

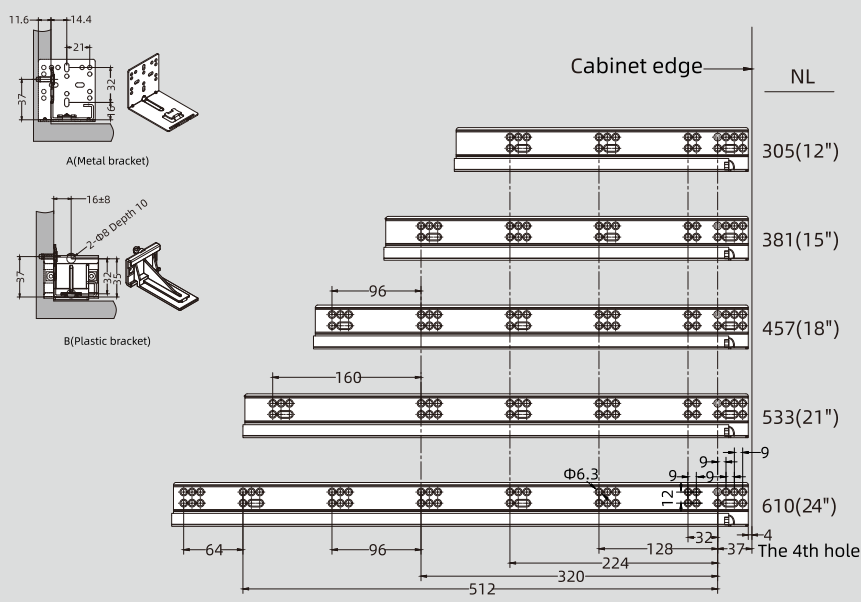

ORDER NUMBER INFORMATION

ITEM NO.(FOR 16mm)	ITEM NO.(FOR 18mm)	SPECIFICATION
S42H600-305	S42H800-305	305mm(12")
S42H600-381	S42H800-381	381mm(15")
S42H600-457	S42H800-457	457mm(18")
S42H600-533	S42H800-533	533mm(21")
S42H600-610	S42H800-610	610mm(24")




S20H(600/800) PARTIAL EXTENSION SOFT-CLOSING UNDERMOUNTED SLIDE

- Load capacity: 25kg
- Length: 250-550mm
- Drawer height adjustment: 0~+3mm




INSTALLATION PARAMETERS

SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling

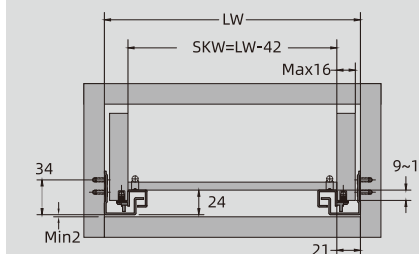


16mm panel

SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling

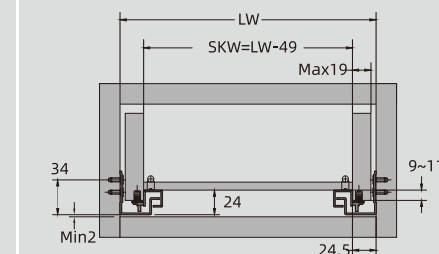


18mm panel

Standard drawer

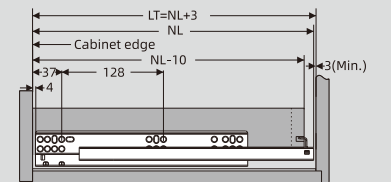


Internal drawer

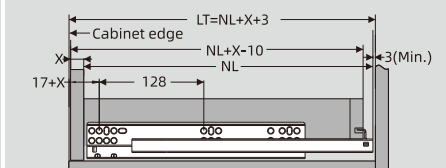


16/18mm panel

Drawer size and drilling (mm)

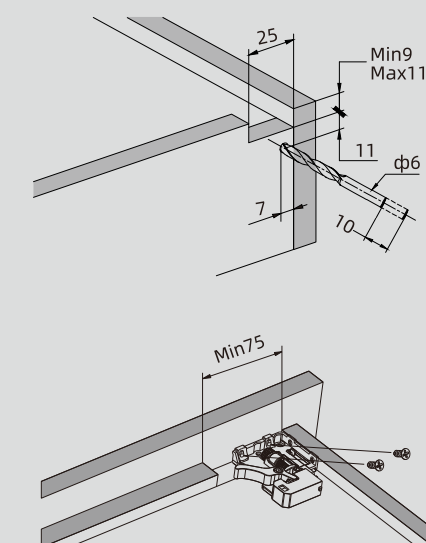

Hole position (mm)

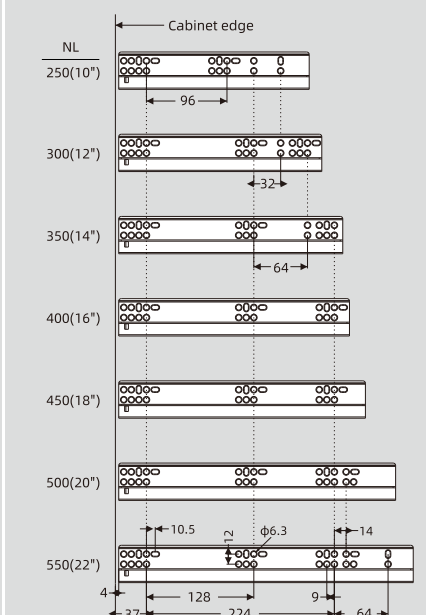

ORDER NUMBER INFORMATION

ITEM NO.(FOR 16mm)	ITEM NO.(FOR 18mm)	SPECIFICATION
S20H600-250	S20H800-250	250mm(10")
S20H600-300	S20H800-300	300mm(12")
S20H600-350	S20H800-350	350mm(14")
S20H600-400	S20H800-400	400mm(16")
S20H600-450	S20H800-450	450mm(18")
S20H600-500	S20H800-500	500mm(20")
S20H600-550	S20H800-550	550mm(22")


S20F(600/800)
PARTIAL EXTENSION PUSH TO OPEN
UNDERMOUNTED SLIDE

- Load capacity: 25kg
- Length: 250-550mm
- Drawer height adjustment:0~+3mm




INSTALLATION PARAMETERS

SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling

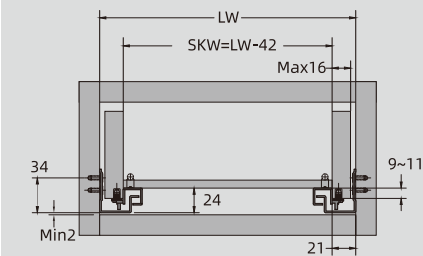


16mm panel

SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling

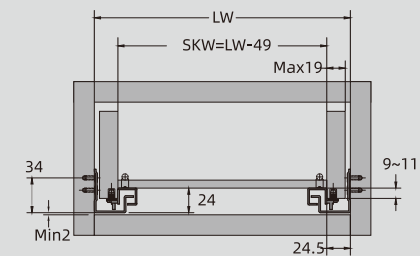


18mm panel

Standard drawer

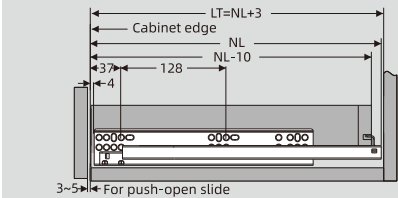


Internal drawer

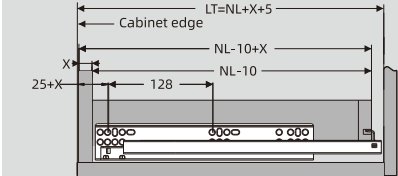


16/18mm panel

Drawer size and drilling (mm)

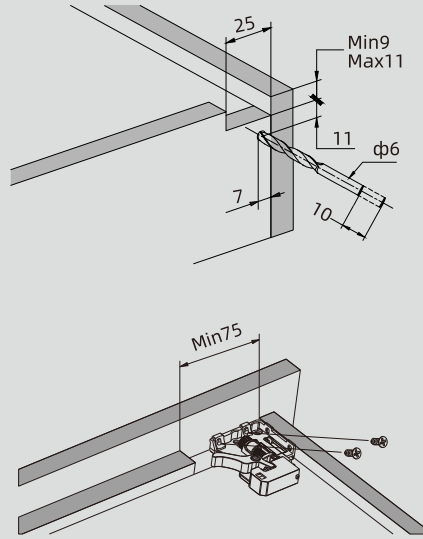

Hole position (mm)

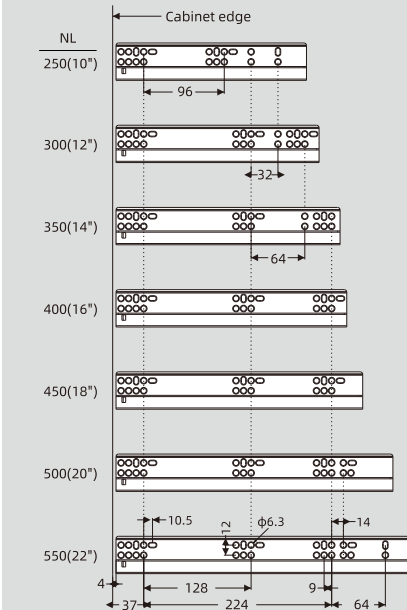

ORDER NUMBER INFORMATION

ITEM NO.(FOR 16mm)	ITEM NO.(FOR 18mm)	SPECIFICATION
S20F600-250	S20F800-250	250mm(10")
S20F600-300	S20F800-300	300mm(12")
S20F600-350	S20F800-350	350mm(14")
S20F600-400	S20F800-400	400mm(16")
S20F600-450	S20F800-450	450mm(18")
S20F600-500	S20F800-500	500mm(20")
S20F600-550	S20F800-550	550mm(22")




S21H(600/800)
PARTIAL EXTENSION SOFT-CLOSING
UNDERMOUNTED SLIDE

- Load capacity: 25kg
- Length: 250-550mm
- Drawer height adjustment:0~+3mm


INSTALLATION PARAMETERS

SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling

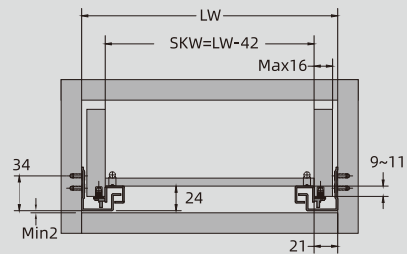


16mm panel

SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling

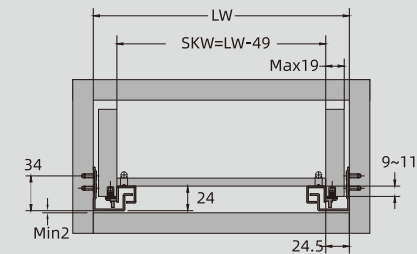


18mm panel

Standard drawer

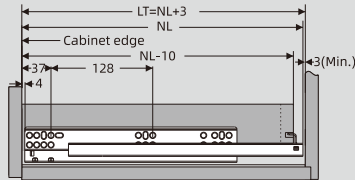




Internal drawer

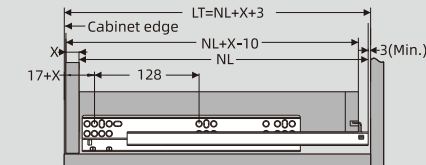


16/18mm panel

Drawer size and drilling (mm)

NL(mm)	250	300	350	400	450	500	550
X2(mm)	188	213	238	273	298	323	358
X3(mm)	220	245	270	305	330	355	390



Hole position (mm)

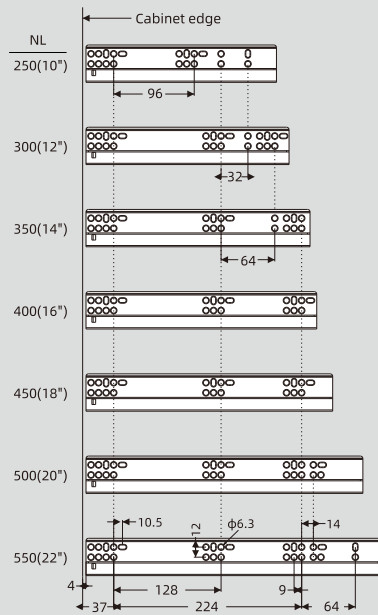

ORDER NUMBER INFORMATION


ITEM NO.(FOR 16mm)	ITEM NO.(FOR 18mm)	SPECIFICATION
S21H600-250	S21H800-250	250mm(10")
S21H600-300	S21H800-300	300mm(12")
S21H600-350	S21H800-350	350mm(14")
S21H600-400	S21H800-400	400mm(16")
S21H600-450	S21H800-450	450mm(18")
S21H600-500	S21H800-500	500mm(20")
S21H600-550	S21H800-550	550mm(22")

S21F(600/800)
PARTIAL EXTENSION PUSH TO OPEN
UNDERMOUNTED SLIDE

- Load capacity: 25kg
- Length: 250-550mm
- Drawer height adjustment:0~+3mm


INSTALLATION PARAMETERS

SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling

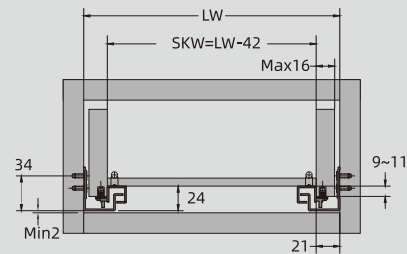


16mm panel

SKW = Internal drawer width
LW = Internal cabinet width
NL = Nominal length
LT = Internal cabinet depth
Drawer size and drilling

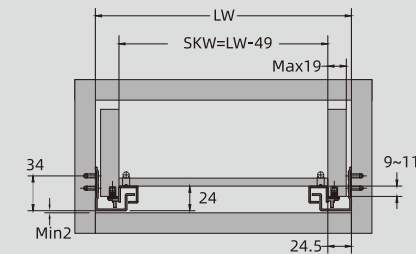


18mm panel

Standard drawer

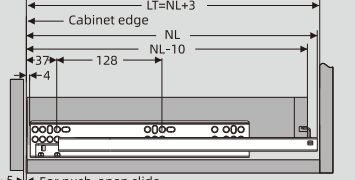




Internal drawer

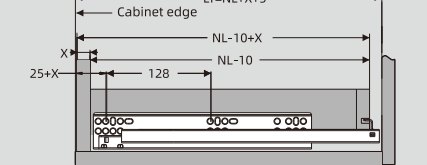


16/18mm panel

Drawer size and drilling (mm)

NL(mm)	250	300	350	400	450	500	550
X2(mm)	189	239	289	339	389	439	489
X3(mm)	221	271	321	371	421	471	521




Hole position (mm)

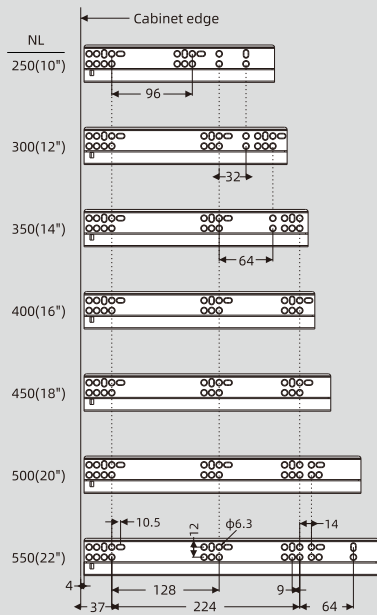

ORDER NUMBER INFORMATION


ITEM NO.(FOR 16mm)	ITEM NO.(FOR 18mm)	SPECIFICATION
S21F600-250	S21F800-250	250mm(10")
S21F600-300	S21F800-300	300mm(12")
S21F600-350	S21F800-350	350mm(14")
S21F600-400	S21F800-400	400mm(16")
S21F600-450	S21F800-450	450mm(18")
S21F600-500	S21F800-500	500mm(20")
S21F600-550	S21F800-550	550mm(22")

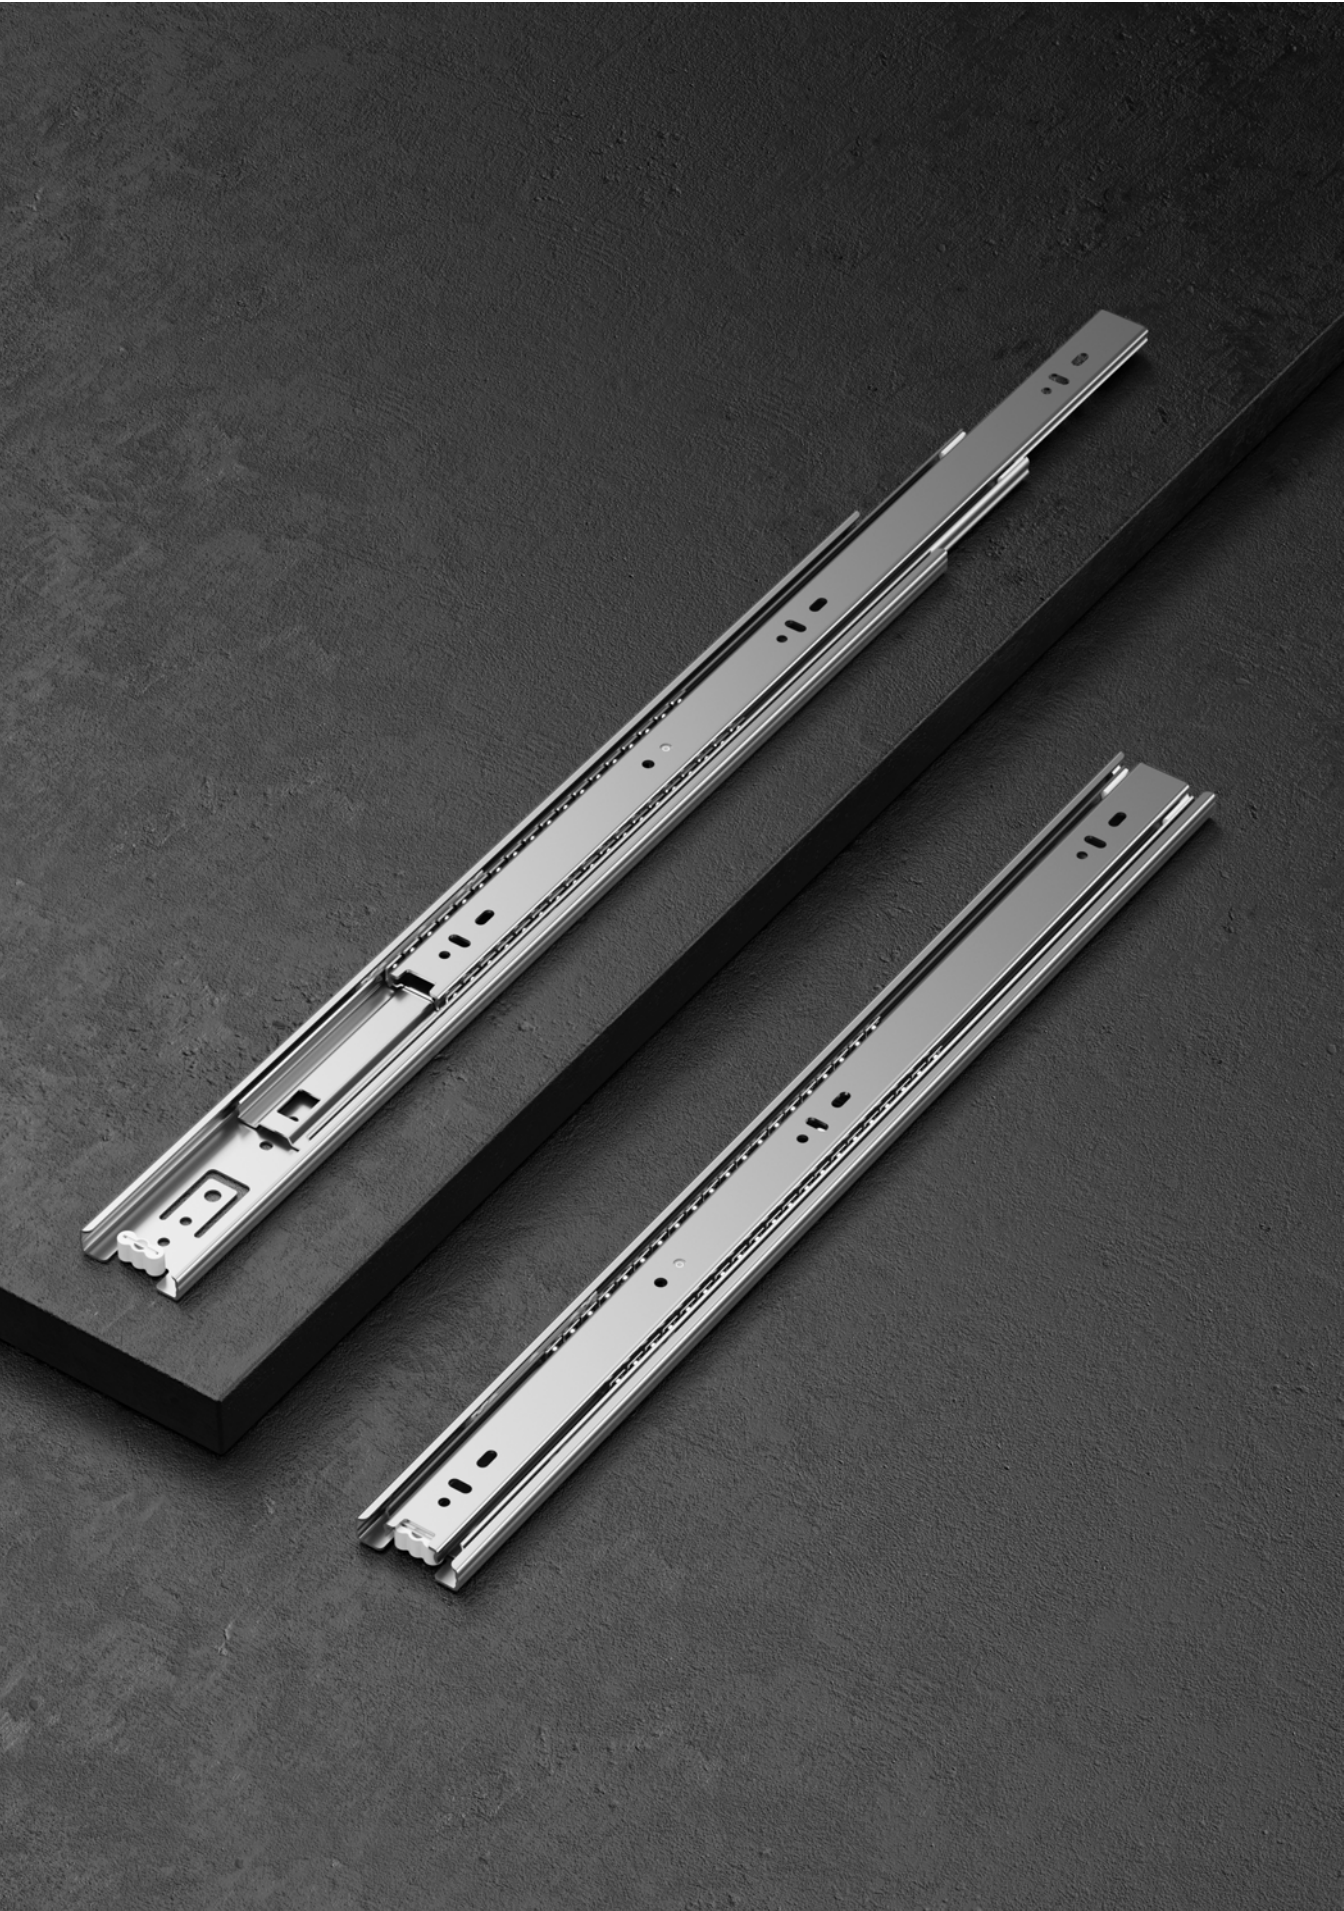

S4501A

FULL EXTENSION BALL BEARING SLIDE

- Width: 45.7mm
 - Thickness: 12.7mm
 - Length: 250-600mm
- Loading capacity: 45kg 18"
 - Finishing: black spray; zinc plated
 - Material thickness: 1.2/1.2/1.5mm



ORDER NUMBER INFORMATION


ITEM NO.		SPECIFICATION	HOLE PATTERN										
			A	B	C	D	E	F	G	H	I	K	XC
S4501A0-250	S4501A1-250	250mm(10")	250	245	174.5	160	224	352	228	416	50	20	250
S4501A0-300	S4501A1-300	300mm(12")	300	295	96								300
S4501A0-350	S4501A1-350	350mm(14")	350	345	128								350
S4501A0-400	S4501A1-400	400mm(16")	400	395	160								400
S4501A0-450	S4501A1-450	450mm(18")	450	445	160								450
S4501A0-500	S4501A1-500	500mm(20")	500	495	192								500
S4501A0-550	S4501A1-550	550mm(22")	550	545	224								550
S4501A0-600	S4501A1-600	600mm(24")	600	595	256								600

A0 for zinc plating; A1 for black spray

S4501B

FULL EXTENSION BALL BEARING SLIDE

- Width: 44.8mm
 - Thickness: 12.7mm
 - Length: 250-600mm
- Loading capacity: 35kg 18"
 - Finishing: black spray; zinc plated
 - Material thickness: 1.0/1.0/1.2mm




ORDER NUMBER INFORMATION

ITEM NO.		SPECIFICATION	HOLE PATTERN										
			A	B	C	D	E	F	G	H	I	K	XC
S4501B0-250	S4501B1-250	250mm(10")	250	245	174.5	160	224	352	228	416	50	20	250
S4501B0-300	S4501B1-300	300mm(12")	300	295	96								300
S4501B0-350	S4501B1-350	350mm(14")	350	345	128								350
S4501B0-400	S4501B1-400	400mm(16")	400	395	160								400
S4501B0-450	S4501B1-450	450mm(18")	450	445	160								450
S4501B0-500	S4501B1-500	500mm(20")	500	495	192								500
S4501B0-550	S4501B1-550	550mm(22")	550	545	224								550
S4501B0-600	S4501B1-600	600mm(24")	600	595	256								600

B0 for zinc plating; B1 for black spray

INSTALLATION PARAMETERS

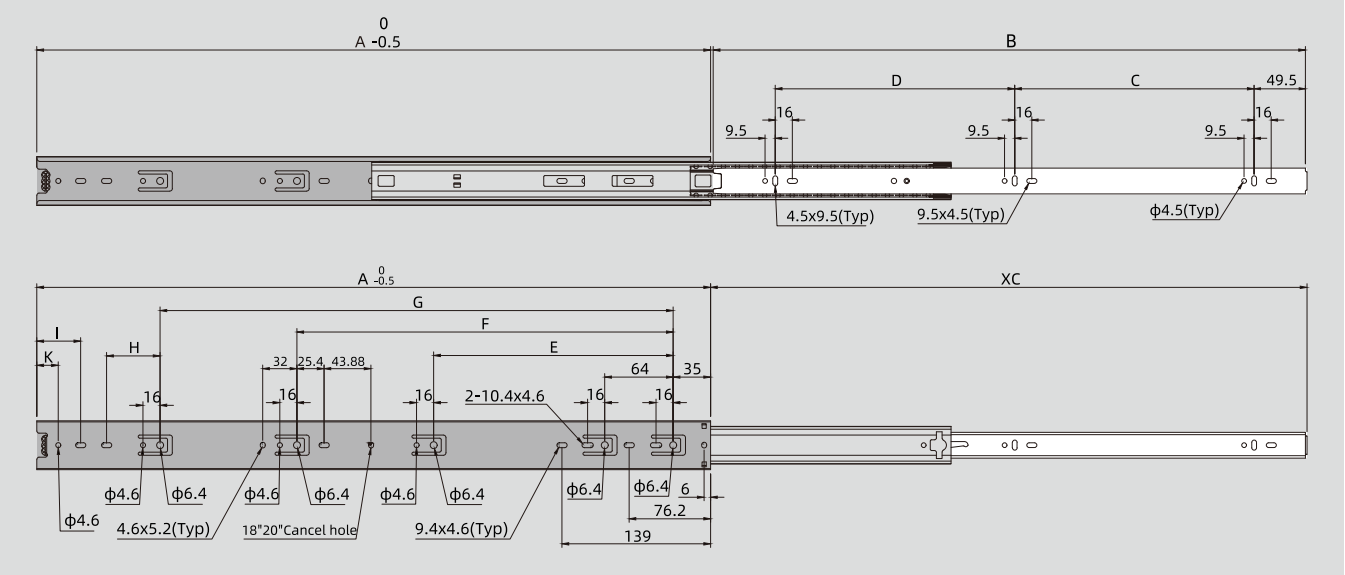




S4502A

FULL EXTENSION SOFT-CLOSING BALL BEARING SLIDE

- Width: 45.7mm
 - Thickness: 12.7mm
 - Length: 250-600mm
- Loading capacity: 35kg 18"
 - Finishing: black spray; zinc plated
 - Material thickness: 1.2/1.2/1.5mm



ORDER NUMBER INFORMATION


ITEM NO.		SPECIFICATION	HOLE PATTERN						
			A	B	C	D	E	F	XC
S4502A0-250	S4502A1-250	250mm(10")	250	240	64	160	128		190
S4502A0-300	S4502A1-300	300mm(12")	300	290		224			255
S4502A0-350	S4502A1-350	350mm(14")	350	340	96	256	128		340
S4502A0-400	S4502A1-400	400mm(16")	400	390	128	320	192		400
S4502A0-450	S4502A1-450	450mm(18")	450	440	160	352	224		450
S4502A0-500	S4502A1-500	500mm(20")	500	490	192	416	256		500
S4502A0-550	S4502A1-550	550mm(22")	550	540	224	448	224	320	550
S4502A0-600	S4502A1-600	600mm(24")	600	590	224	512	224	352	600

A0 for zinc plating; A1 for black spray

S4502B

FULL EXTENSION SOFT-CLOSING BALL BEARING SLIDE

- Width: 44.8mm
 - Thickness: 12.7mm
 - Length: 250-600mm
- Loading capacity: 25kg 18"
 - Finishing: black spray; zinc plated
 - Material thickness: 1.0/1.0/1.2mm




ORDER NUMBER INFORMATION

ITEM NO.		SPECIFICATION	HOLE PATTERN						
			A	B	C	D	E	F	XC
S4502B0-250	S4502B1-250	250mm(10")	250	240	64	160	128		190
S4502B0-300	S4502B1-300	300mm(12")	300	290		224			255
S4502B0-350	S4502B1-350	350mm(14")	350	340	96	256	128		340
S4502B0-400	S4502B1-400	400mm(16")	400	390	128	320	192		400
S4502B0-450	S4502B1-450	450mm(18")	450	440	160	352	224		450
S4502B0-500	S4502B1-500	500mm(20")	500	490	192	416	256		500
S4502B0-550	S4502B1-550	550mm(22")	550	540	224	448	224	320	550
S4502B0-600	S4502B1-600	600mm(24")	600	590	224	512	224	352	600

B0 for zinc plating; B1 for black spray


INSTALLATION PARAMETERS

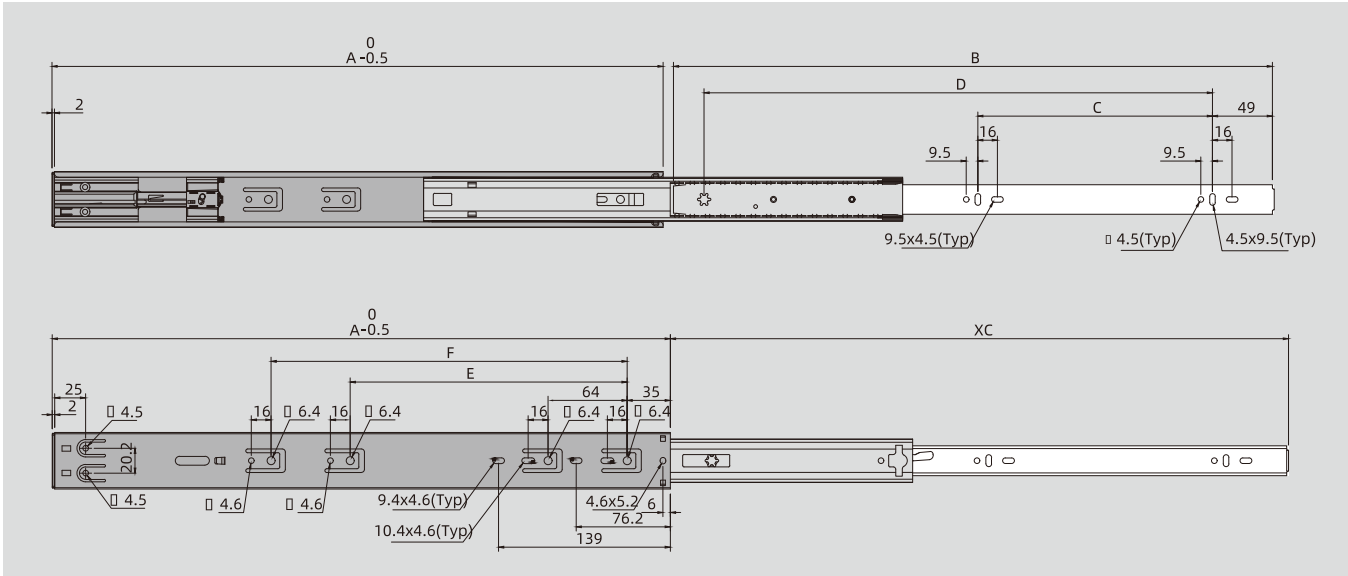



S4503
FULL EXTENSION PUSH TO OPEN BALL BEARING SLIDE

- Width: 45.7mm
 - Thickness: 12.7mm
 - Length: 250-600mm
- Loading capacity: 35kg 18"
 - Finishing: black spray; zinc plated
 - Material thickness: 1.2/1.2/1.5mm




ORDER NUMBER INFORMATION

ITEM NO.			SPECIFICATION						HOLE PATTERN					
						A	B	C	D	E	F			
S4503A0-250	S4503A1-250	250mm(10")				250	235							
S4503A0-300	S4503A1-300	300mm(12")				300	285	64	128					
S4503A0-350	S4503A1-350	350mm(14")				350	335	96	128	128				
S4503A0-400	S4503A1-400	400mm(16")				400	385	128	160	192				
S4503A0-450	S4503A1-450	450mm(18")				450	435	160	160	224				
S4503A0-500	S4503A1-500	500mm(20")				500	485	192	192	256				
S4503A0-550	S4503A1-550	550mm(22")				550	535	224	192	224	320			
S4503A0-600	S4503A1-600	600mm(24")				600	585	224	256	224	352			

A0 for zinc plating; A1 for black spray

INSTALLATION PARAMETERS

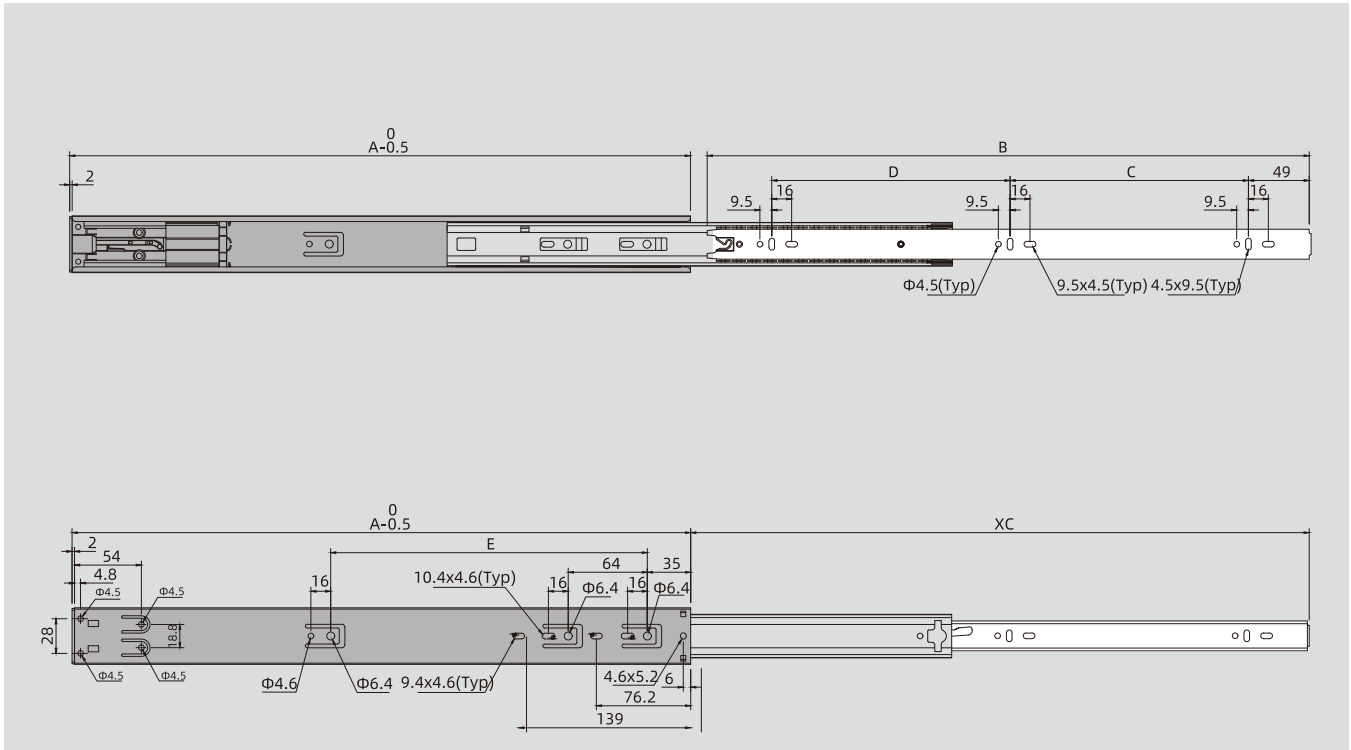

NOTE: